




配套产品选项 Attachment Option

控制技术 Control Technology

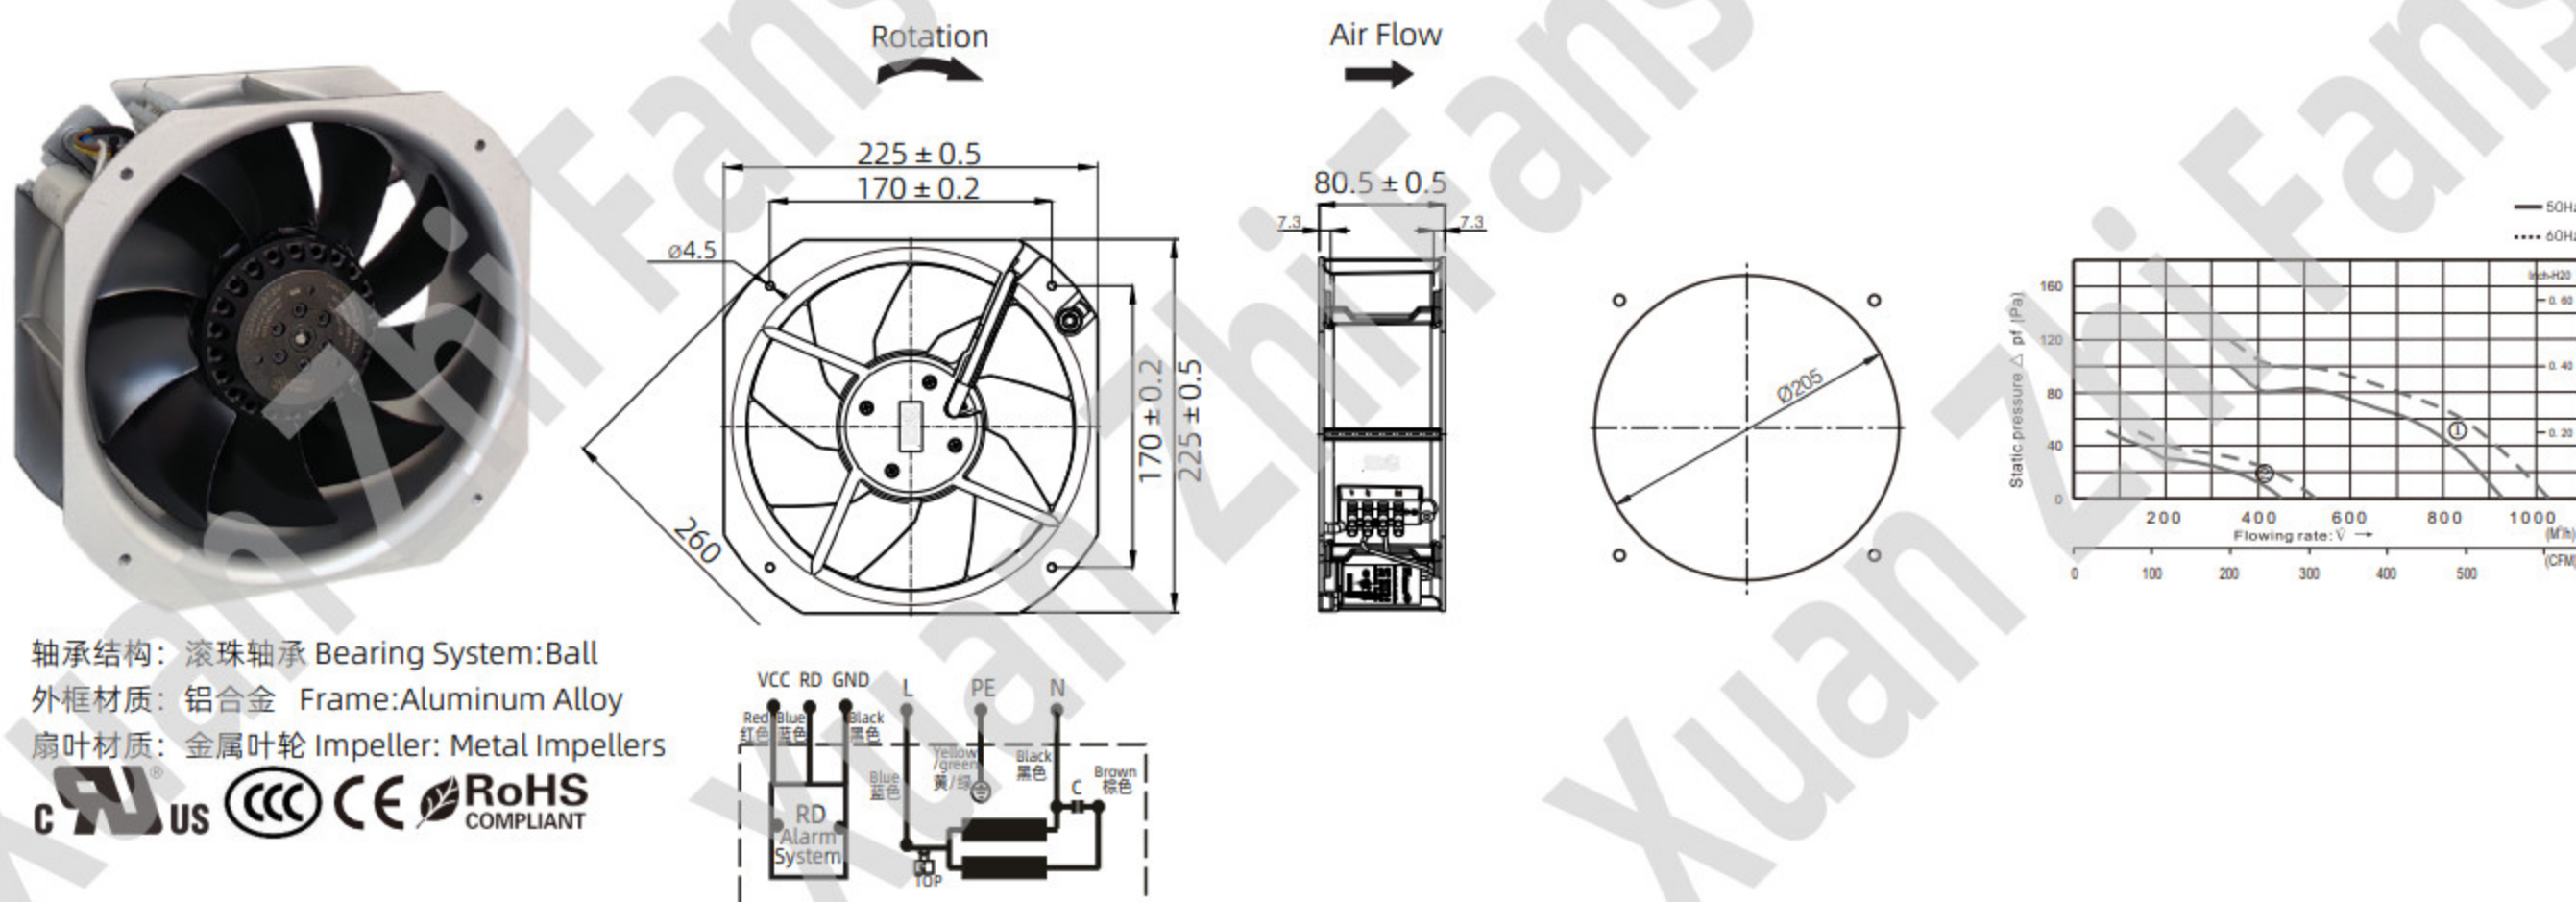


配套产品选项 Attachment Option

风扇附件 Fan Accessories



型号 Model	轴承 Bearing System	额定电压 Rated Voltage	额定频率 Rated Frequency	额定电流 Rated Current	额定功率 Rated Power	额定转速 Rated Speed	最大风量 Max. Air Flow		最大风压 Max. Air Pressure		噪音 Noise	重量 Weight
Part no.	Ball	VAC	Hz	A	W	RPM	CFM	m³/h	mmH₂O	Pa	dB(A)	g
XZ22580HBT1R	B	115	50/60	0.64/0.60	58/64	2470/2650	608	1032.99	12.24	120	59/61	2100
XZ22580HBT2R	B	230	50/60	0.29/0.31	63/79	2500/2800	608	1032.99	12.24	120	59/61	
XZ22580HBT3R	B	380	50/60	0.17/0.19	60/70	2500/2800	608	1032.99	12.24	120	59/61	

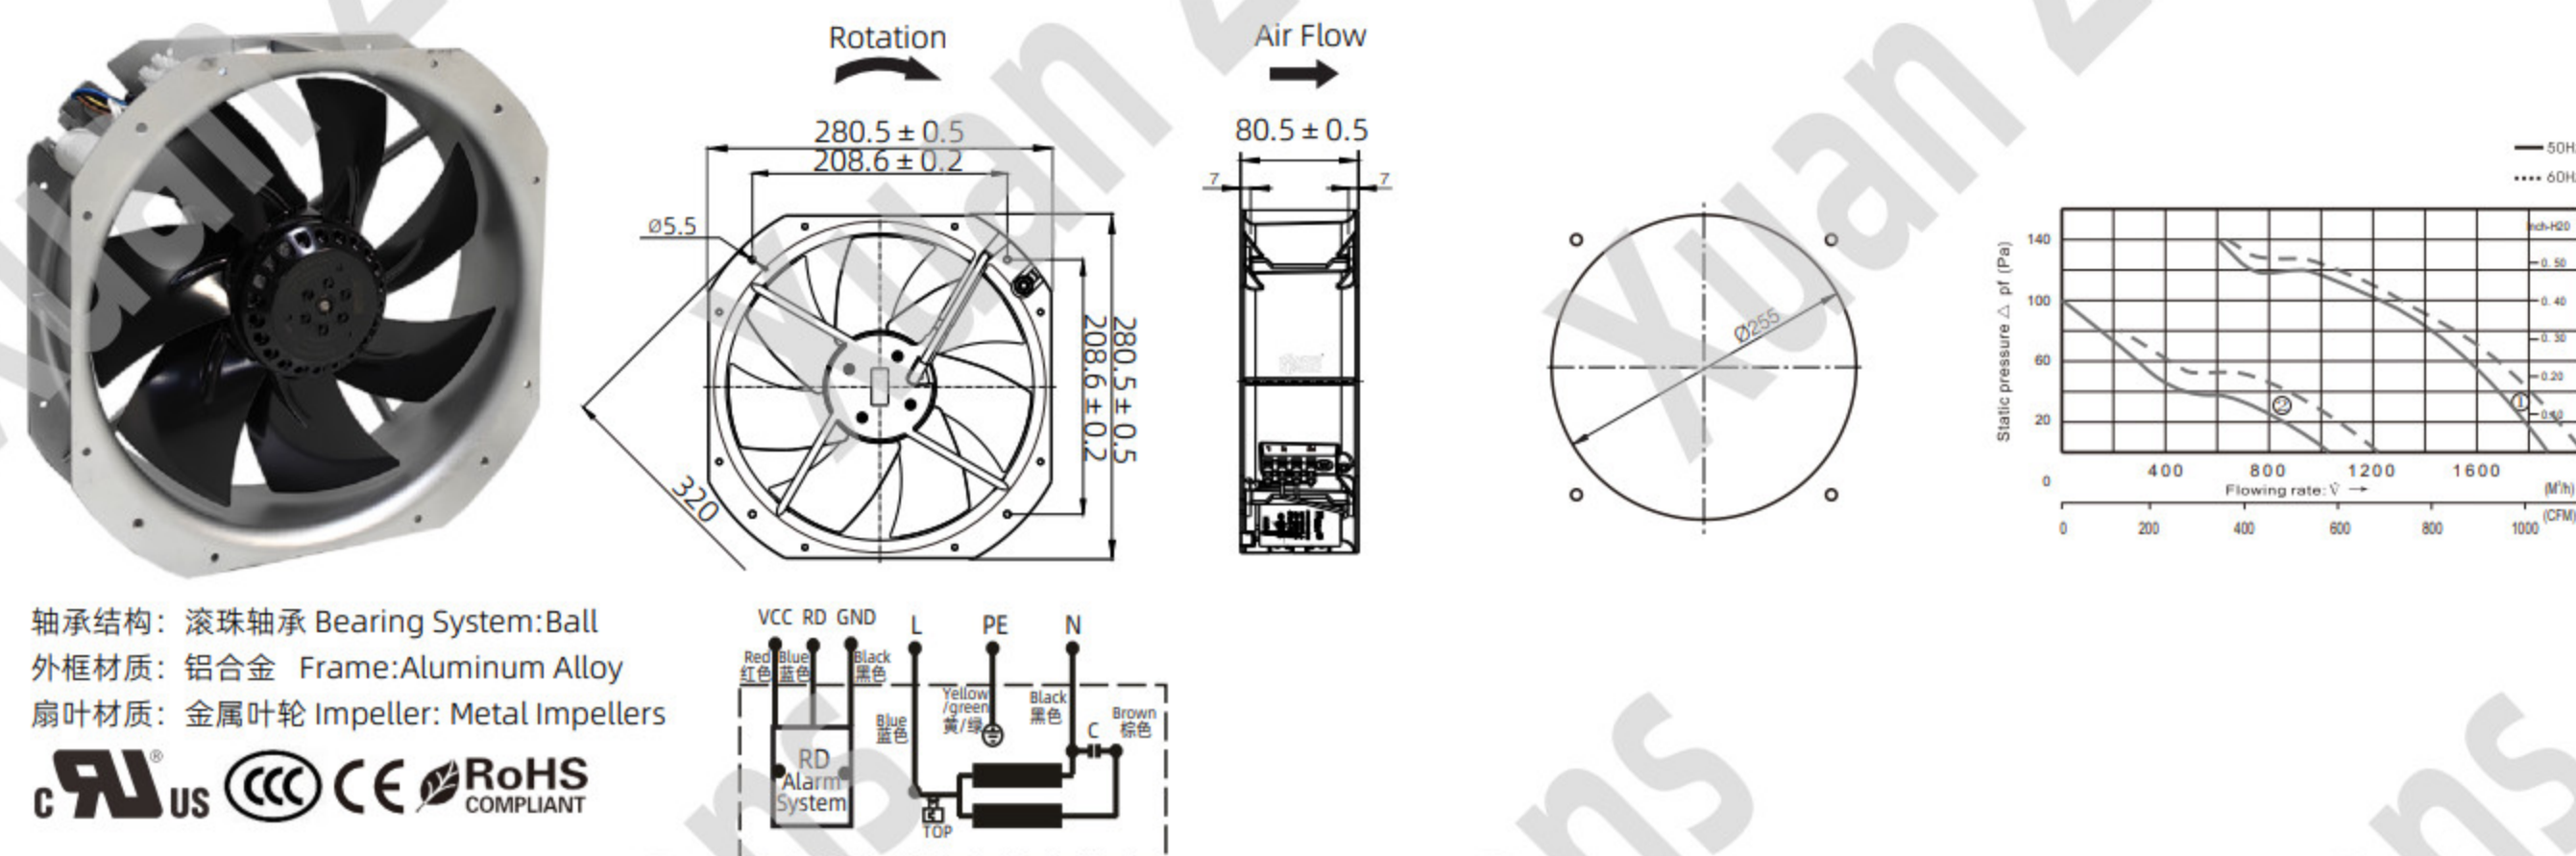

配套产品选项 Attachment Option

控制技术 Control Technology



配套产品选项 Attachment Option

风扇附件 Fan Accessories



型号 Model	轴承 Bearing System	额定电压 Rated Voltage	额定频率 Rated Frequency	额定电流 Rated Current	额定功率 Rated Power	额定转速 Rated Speed	最大风量 Max. Air Flow		最大风压 Max. Air Pressure		噪音 Noise	重量 Weight
Part no.	Ball	VAC	Hz	A	W	RPM	CFM	m³/h	mmH₂O	Pa	dB(A)	g
XZ28080HBT1R	B	115	50/60	1.06/1.20	108/145	2500/2700	1150	1953.85	14.29	140	69/70	2700
XZ28080HBT2R	B	230	50/60	0.48/0.60	110/145	2550/2800	1150	1953.85	14.29	140	69/70	
XZ28080HBT3R	B	380	50/60	0.29/0.39	110/150	2550/2800	1150	1953.85	14.29	140	69/70	