

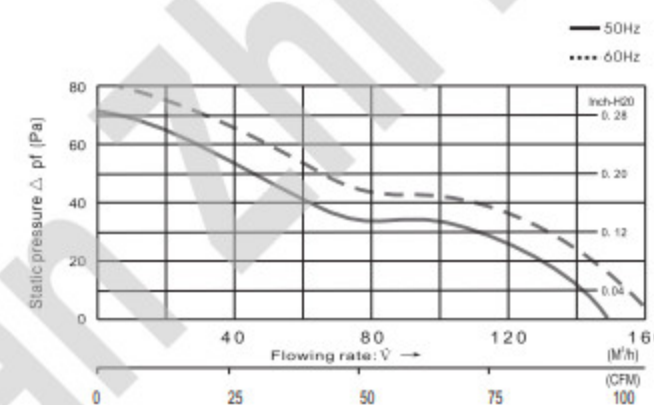




轴承结构: 滚珠轴承 Bearing System: Ball
外框材质: 铝合金 Frame: Aluminum Alloy
扇叶材质: 金属叶轮 Impeller: Metal Impellers

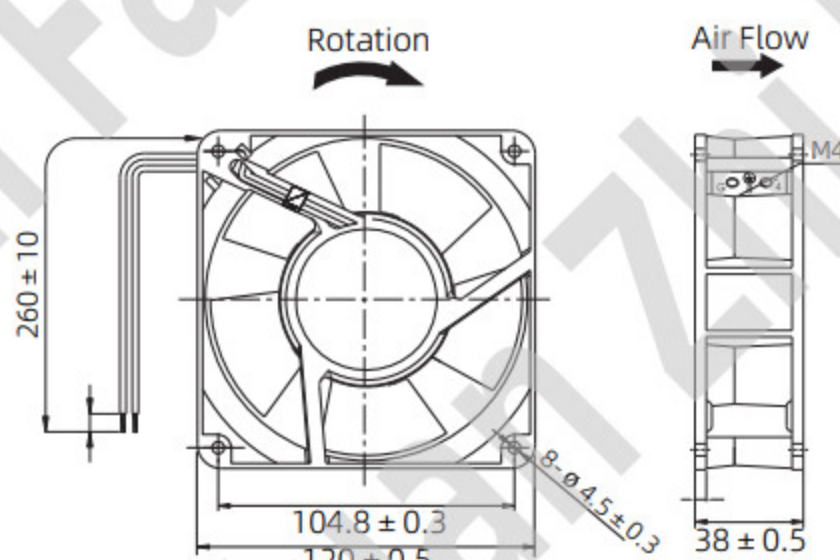

配套产品选项 Attachment Option

控制技术
Control Technology



配套产品选项 Attachment Option




控制技术
Control Technology



型号 Model	轴承 Bearing System	额定电压 Rated Voltage	额定频率 Rated Frequency	额定电流 Rated Current	额定功率 Rated Power	额定转速 Rated Speed	最大风量 Max. Air Flow		最大风压 Max. Air Pressure		噪音 Noise	重量 Weight
Part no.	Ball	VAC	Hz	A	W	RPM	CFM	m ³ /h	mmH ₂ O	Pa	dB(A)	g
XZ12038HBL1A	B	115	50/60	0.26/0.22	20/13	2650/3050	88/98	149.51	8.16	80	42/45	500
XZ12038HBL2A	B	230	50/60	0.15/0.11	19/13	2650/3000	88/98	149.51	8.16	80	42/45	
XZ12038HBL3A	B	380	50/60	0.09/0.08	20/13	2650/3000	88/98	149.51	8.16	80	42/45	



轴承结构: 滚珠轴承 Bearing System: Ball
外框材质: 铝合金 Frame: Aluminum Alloy
扇叶材质: 金属叶轮 Impeller: Metal Impellers

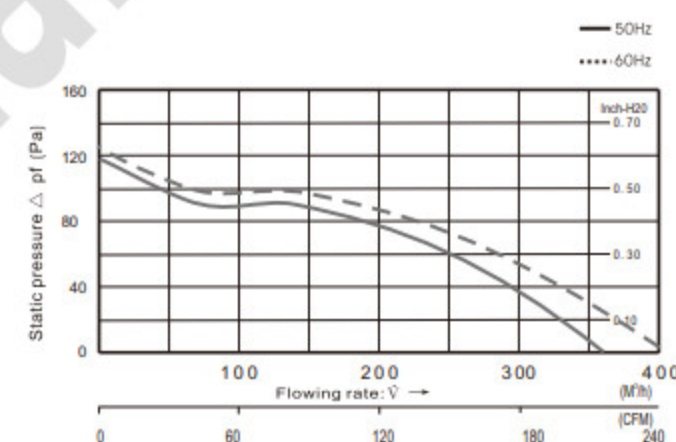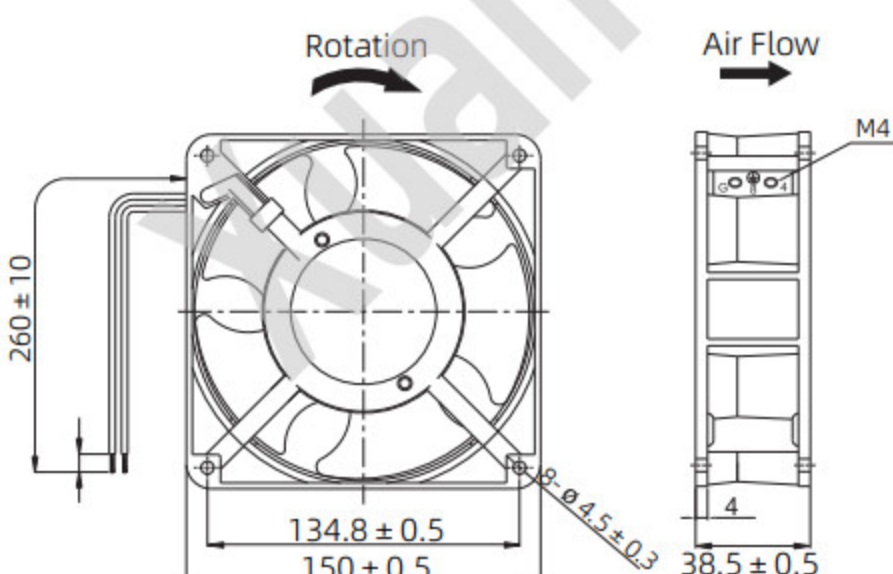

配套产品选项 Attachment Option

控制技术
Control Technology



配套产品选项 Attachment Option

控制技术
Control Technology



型号 Model	轴承 Bearing System	额定电压 Rated Voltage	额定频率 Rated Frequency	额定电流 Rated Current	额定功率 Rated Power	额定转速 Rated Speed	最大风量 Max. Air Flow		最大风压 Max. Air Pressure		噪音 Noise	重量 Weight
Part no.	Ball	VAC	Hz	A	W	RPM	CFM	m ³ /h	mmH ₂ O	Pa	dB(A)	g
XZ15038HBL1A	B	115	50/60	0.54/0.50	40/36	2650/3000	188/202	319.41	12.45	122	51/53	760
XZ15038HBL2A	B	230	50/60	0.31/0.25	41/36	2650/3000	188/202	319.41	12.45	122	51/53	
XZ15038HBL3A	B	380	50/60	0.23/0.20	41/36	2650/3000	188/202	319.41	12.45	122	51/53	

注: 以上数据仅供参考, 如有变更恕不另行通知。

Notes: Above specification is only for reference and subject to change without notice.

AC Axial fan
AC轴流风机

EC Axial fan
EC轴流风机

DC Axial fan
DC轴流风机

AC Centrifugal fan
AC离心风机

EC Centrifugal fan
EC离心风机

AC External rotor fan
AC外转子风机

Fan filter
风扇过滤器

Governor/voltage Regulator
调速器及调压器

Temperature control products
温控产品

Accessories
附件