


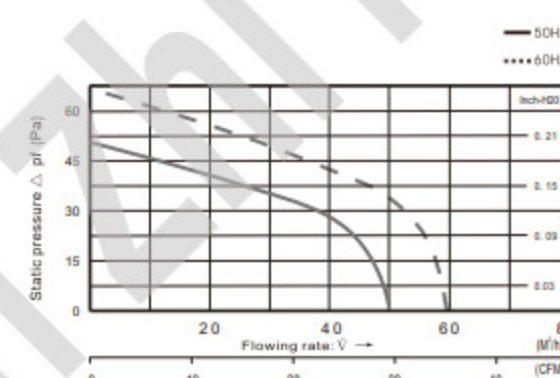



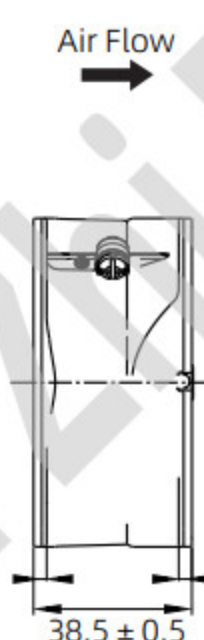

控制技术
Control Technology

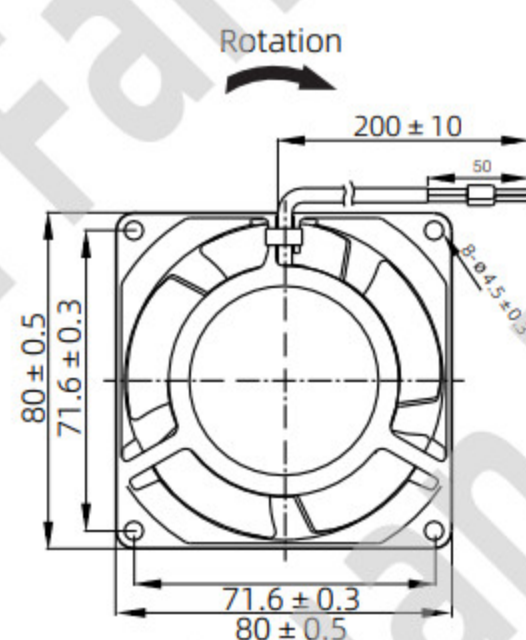




控制技术
Control Technology



型号 Model	轴承 Bearing System	额定电压 Rated Voltage	额定频率 Rated Frequency	额定电流 Rated Current	额定功率 Rated Power	额定转速 Rated Speed	最大风量 Max. Air Flow		最大风压 Max. Air Pressure		噪音 Noise	重量 Weight
Part no.	Ball	VAC	Hz	A	W	RPM	CFM	m³/h	mmH₂O	Pa	dB(A)	g
XZ8038HBL1M	B	115	50/60	0.18/0.15	15/12	2800/3350	36	60.65	6.94	68	31/35	365
XZ8038HBL2M	B	230	50/60	0.09/0.08	15/12	2800/3350	36	60.65	6.94	68	31/35	
XZ8038HBL3M	B	380	50/60	0.07/0.05	15/12	2800/3350	36	60.65	6.94	68	31/35	



CUL **CCC** **CE** **RoHS**
US COMPLIANT

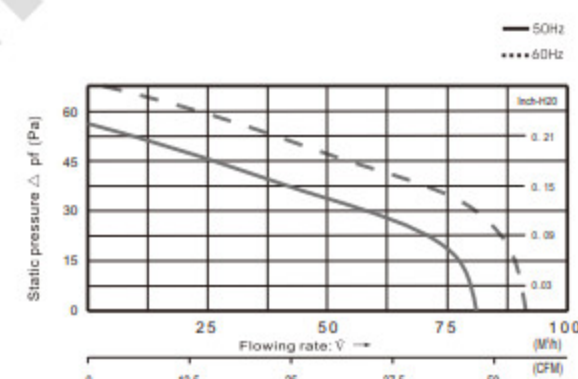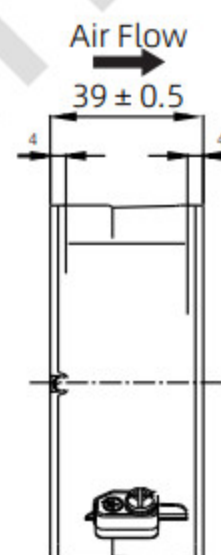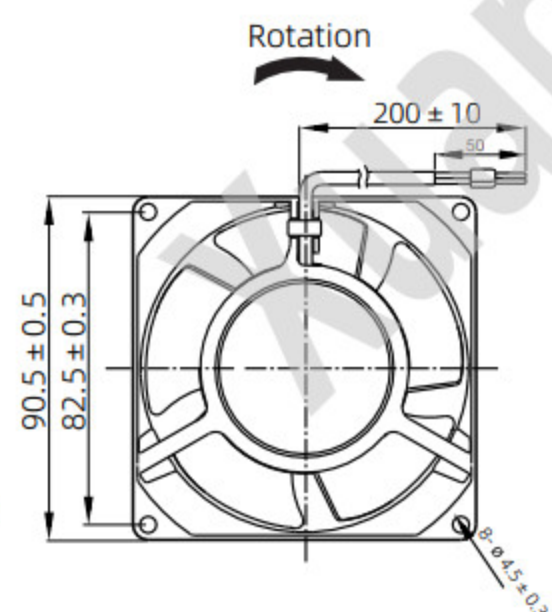

控制技术
Control Technology



控制技术
Control Technology



型号 Model	轴承 Bearing System	额定电压 Rated Voltage	额定频率 Rated Frequency	额定电流 Rated Current	额定功率 Rated Power	额定转速 Rated Speed	最大风量 Max. Air Flow		最大风压 Max. Air Pressure		噪音 Noise	重量 Weight
Part no.	Ball	VAC	Hz	A	W	RPM	CFM	m³/h	mmH₂O	Pa	dB(A)	g
XZ9238HBL1M	B	115	50/60	0.18/0.16	15/13	2700/3200	53	90.73	7.65	75	34/36	415
XZ9238HBL2M	B	230	50/60	0.09/0.08	15/13	2700/3200	53	90.73	7.65	75	34/36	
XZ9238HBL3M	B	380	50/60	0.07/0.06	15/13	2700/3200	53	90.73	7.65	75	34/36	

Notes: Above specification is only for reference and subject to change without notice.