


## P-Q 曲线图/P-Q Curve Chart



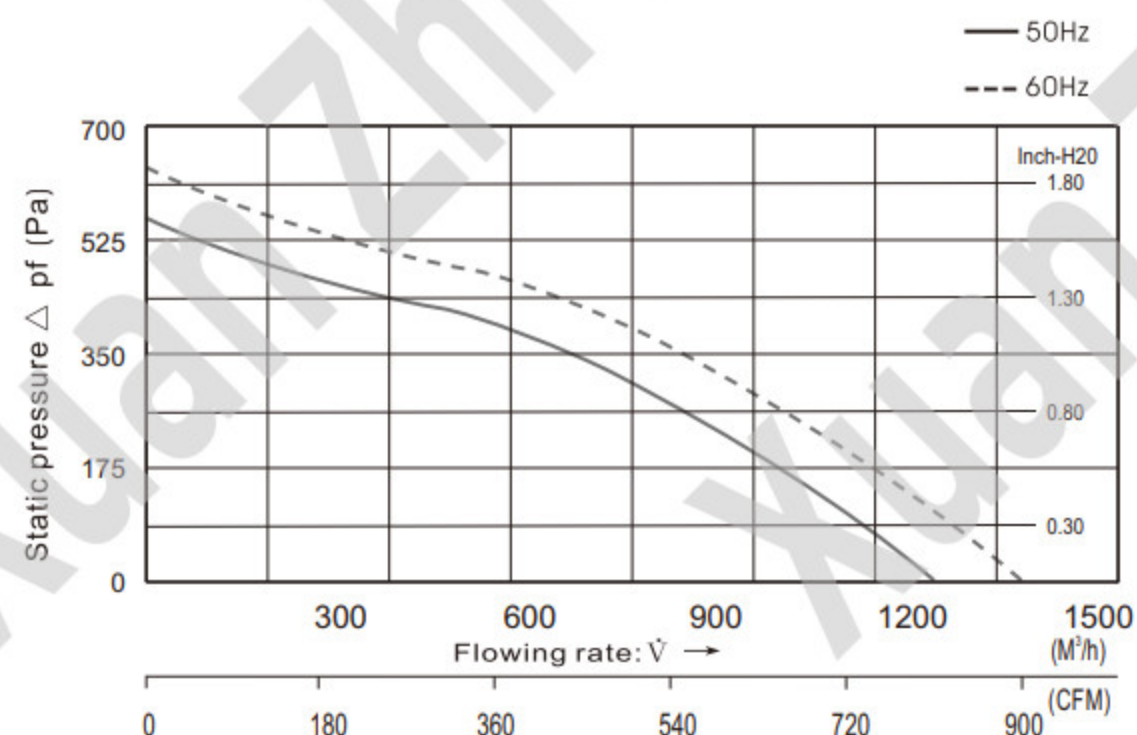


风机类型: 后倾式离心风机  
材 质: PA尼龙  
出风方向: 转子顺时针方向  
电机保护: 热保护器  
绝缘等级: F  
防护等级: IP44  
环境温度: -25°C~60°C

Fan type: centrifugal fan  
Material: Polyamide  
Outlet direction: Rotor timing direction  
Motor protection: thermal protector  
Insulation class: F  
Class of protection: IP44  
Ambient temperature: -25°C~60°C

| 型号<br>Model    | 电压<br>Voltage | 频率<br>Frequency | 电流<br>Current | 输入功率<br>Input power | 转速<br>Speed | 最大风量<br>Max. Air Flow |                   | 最大静压<br>Max. Static pressure | 噪音<br>Noise |
|----------------|---------------|-----------------|---------------|---------------------|-------------|-----------------------|-------------------|------------------------------|-------------|
| Part no.       | V             | HZ              | AMP           | W                   | R/min       | CFM                   | m <sup>3</sup> /h | Pa                           | dB(A)       |
| XE2E225-72M-99 | 230           | 50/60           | 1.02          | 124                 | 2700        | 670.98                | 1140.00           | 600                          | 71          |
| XE2E225-92M-99 | 230           | 50/60           | 1.32          | 170                 | 3020        | 764.40                | 1300.00           | 660                          | 71          |

## 尺寸图Dimension Drawing (Unit : mm)

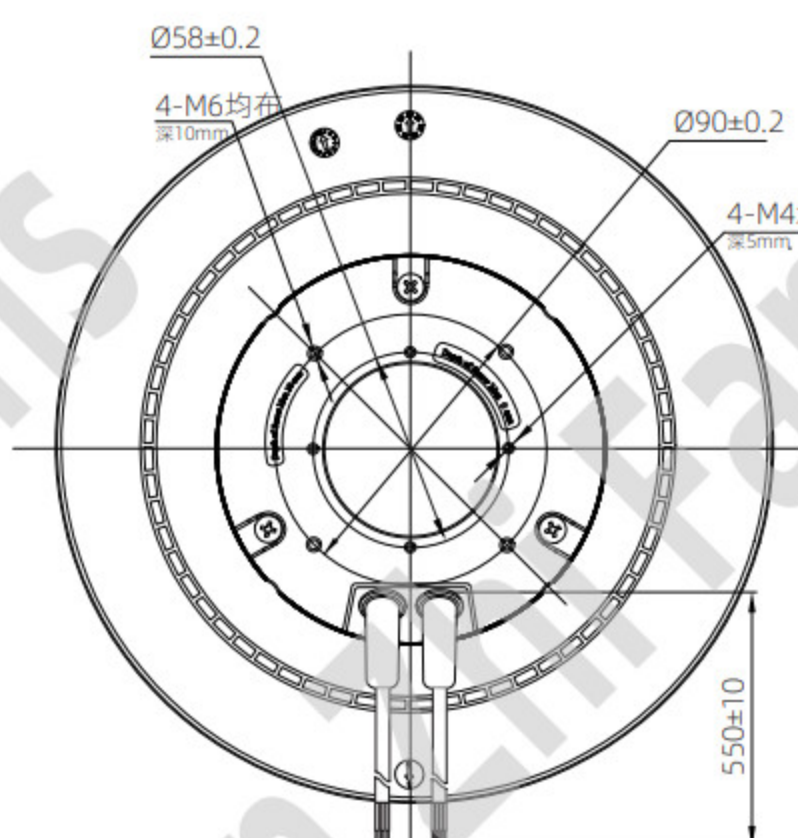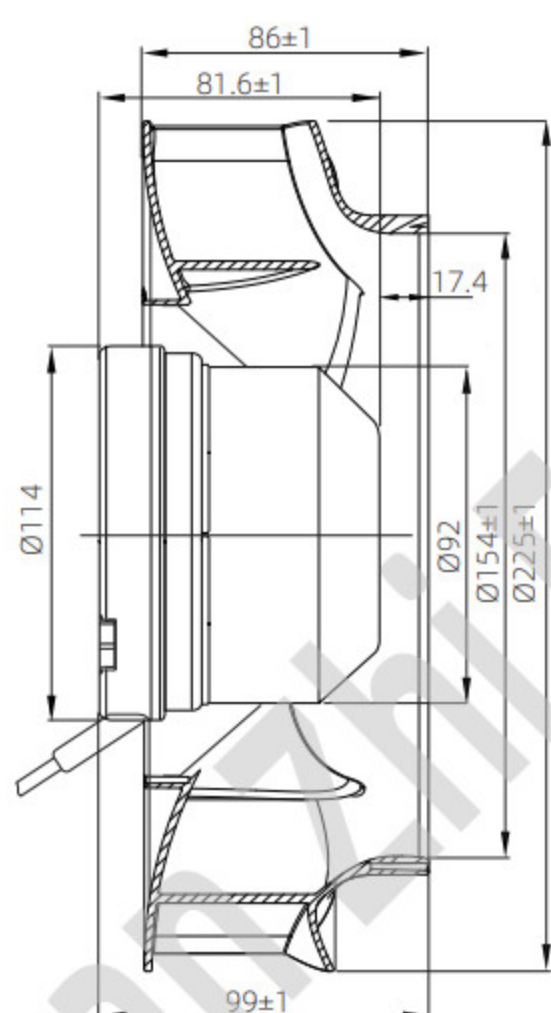

导风圈 (附件)  
Inlet ring (accessory)

风口安装距离  
Installation distance  
between fan and inlet ring

注: 以上数据仅供参考, 如有变更恕不另行通知。

Notes: Above specification is only for reference and subject to change without notice.