



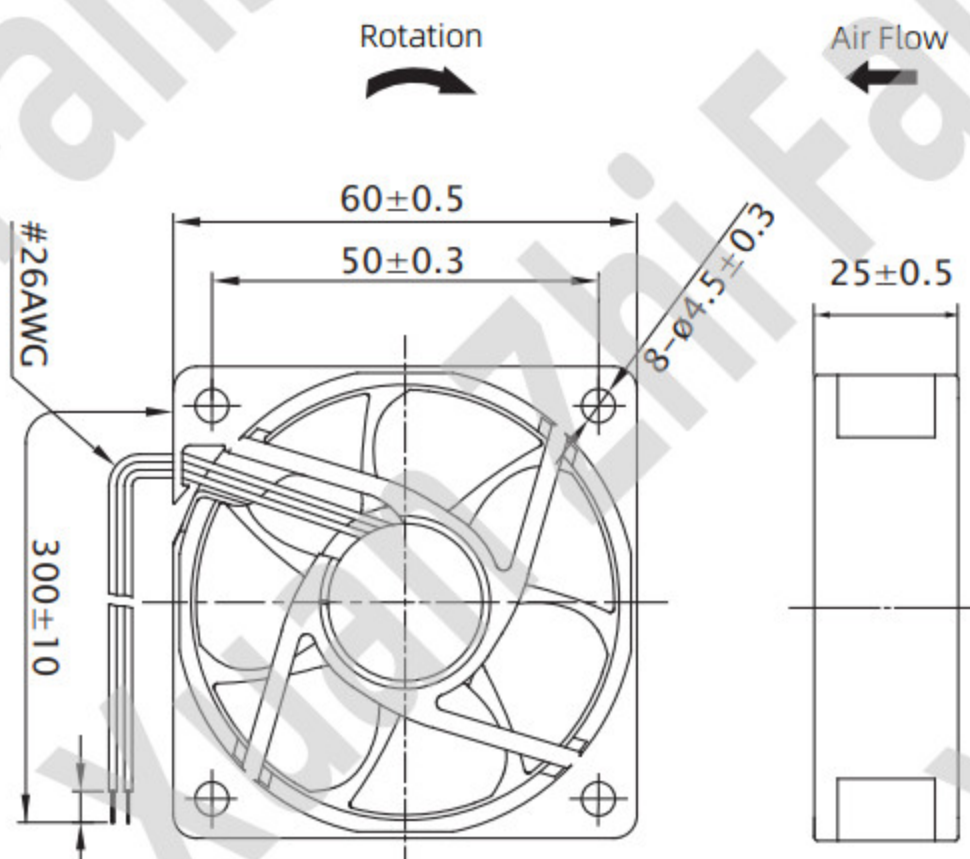

轴承结构: 滚珠轴承
Bearing System: Ball
外框材质: 环保防火PBT UL94V-0
Frame: Thermoplastic PBT UL94V-0
扇叶材质: 环保防火PBT UL94V-0
Impeller: Thermoplastic UL94V-0

P-Q 曲线图/P-Q Curve Chart

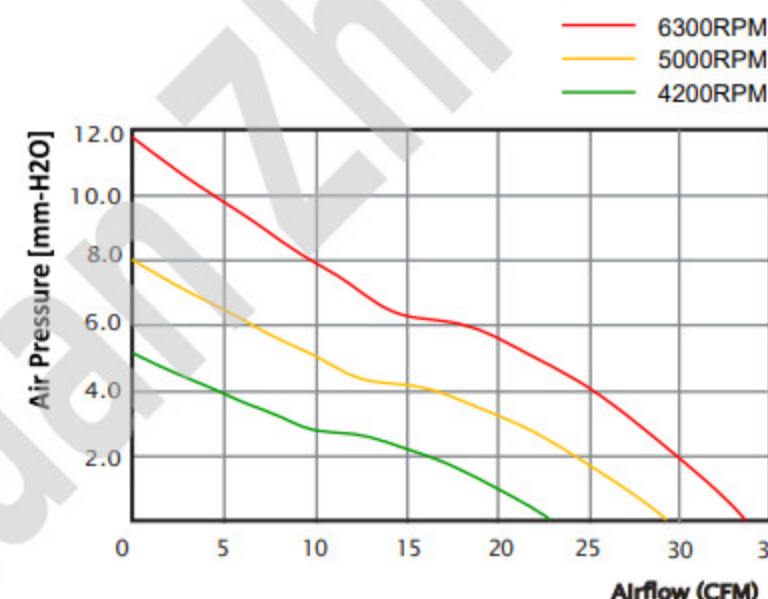


配套产品选项
Attachment Option

控制技术
Control Technology




配套产品选项
Attachment Option

风扇辅件
Fan Accessories

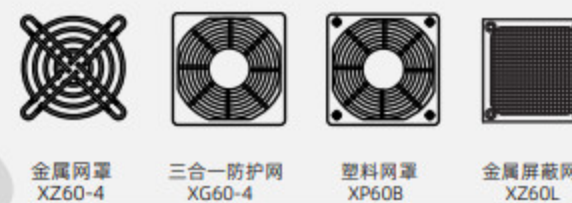


型号 Model	轴承 Bearing System	额定电压 Rated Voltage	频率 Frequency	额定功率 Rated Power	额定转速 Rated Speed	最大风量 Max. Air Flow		最大风压 Max. Air Pressure		噪音 Noise	重量 Weight
	Ball	VAC	Hz	W	RPM	CFM	m³/h	mmH₂O	Pa	dB(A)	g
XE6025BL	B	220	50	1.5	4200	22.53	38.28	5.06	49.59	35	60
XE6025BM	B			2.3	5000	27.98	47.54	8.01	78.50	37	
XE6025BH	B			3.8	6300	33.20	56.41	11.79	115.54	46	

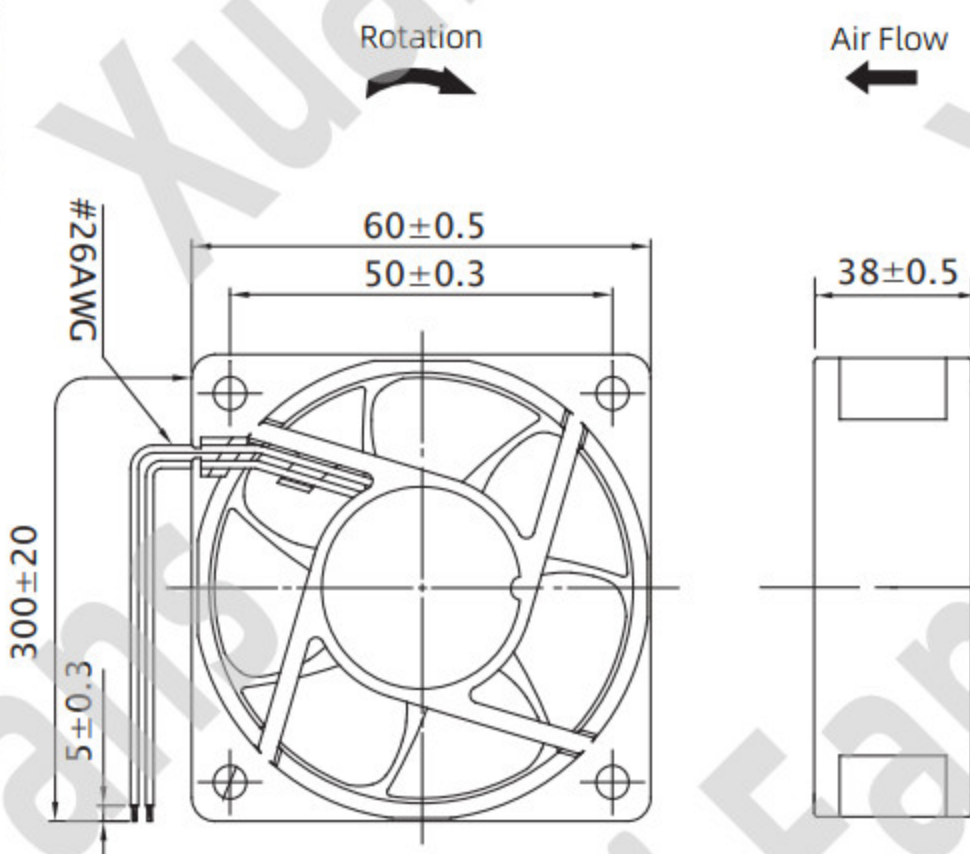

轴承结构: 滚珠轴承
Bearing System: Ball
外框材质: 环保防火PBT UL94V-0
Frame: Thermoplastic PBT UL94V-0
扇叶材质: 环保防火PBT UL94V-0
Impeller: Thermoplastic UL94V-0

P-Q 曲线图/P-Q Curve Chart

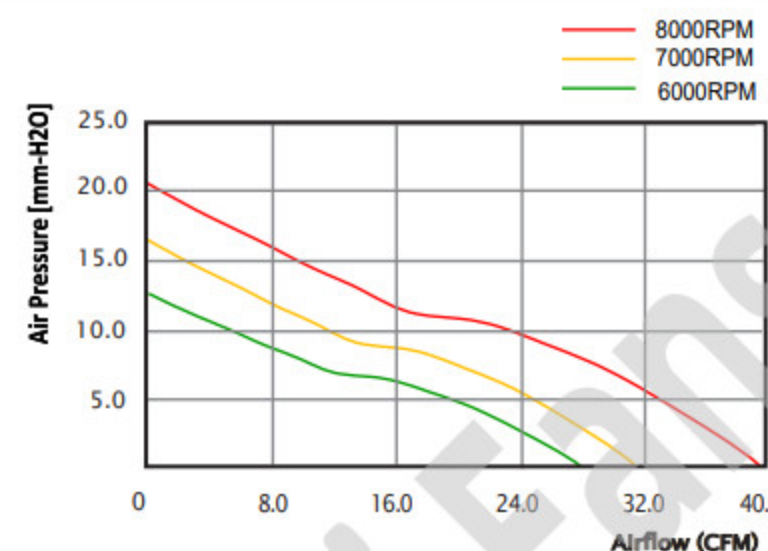

配套产品选项
Attachment Option

控制技术
Control Technology



配套产品选项
Attachment Option

风扇辅件
Fan Accessories



型号 Model	轴承 Bearing System	额定电压 Rated Voltage	频率 Frequency	额定功率 Rated Power	额定转速 Rated Speed	最大风量 Max. Air Flow		最大风压 Max. Air Pressure		噪音 Noise	重量 Weight
	Ball	VAC	Hz	W	RPM	CFM	m³/h	mmH₂O	Pa	dB(A)	g
XE6038BL	B	220	50	2.8	6000	26.03	44.22	12.18	119.36	50	104
XE6038BM	B			3.2	7000	29.79	50.61	16.11	157.88	55	
XE6038BH	B			5.5	8000	39.17	66.55	20.26	198.55	57	

注: 以上数据仅供参考, 如有变更恕不另行通知。

Notes: Above specification is only for reference and subject to change without notice.