



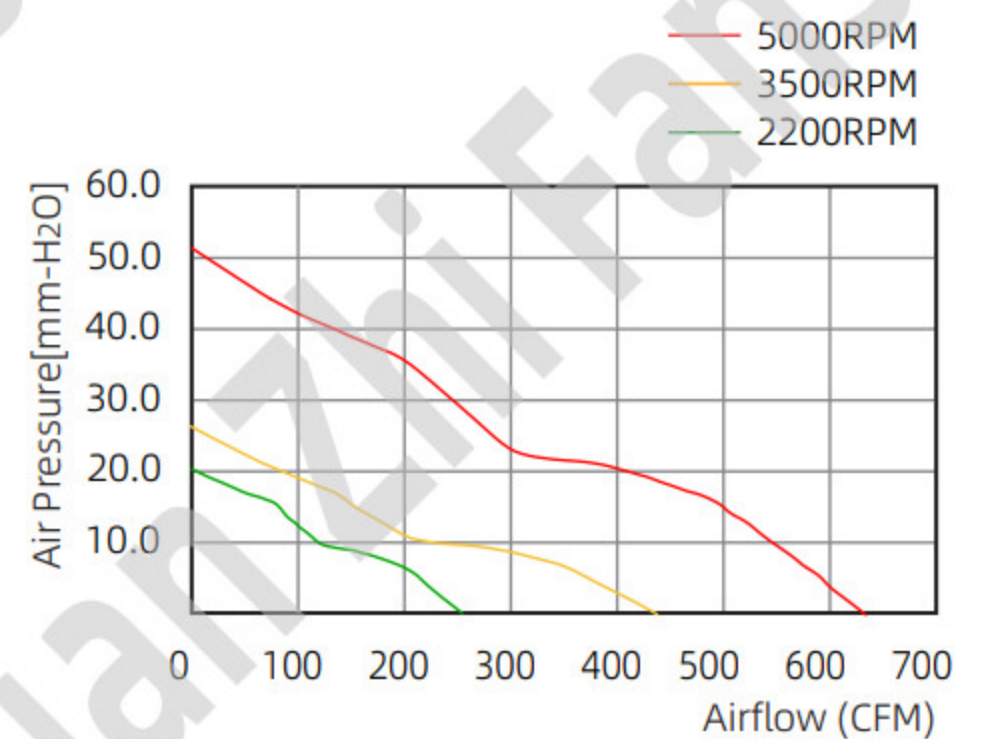

轴承结构：滚珠轴承  
Bearing System: Ball  
外框材质：铝合金  
Frame: Alumimum Alloy  
扇叶材质：环保防火PBT UL94V-0  
Impeller: Thermoplastic UL94V-0

尺寸图Dimension Drawing (Unit : mm)

P-Q 曲线图/P-Q Curve Chart

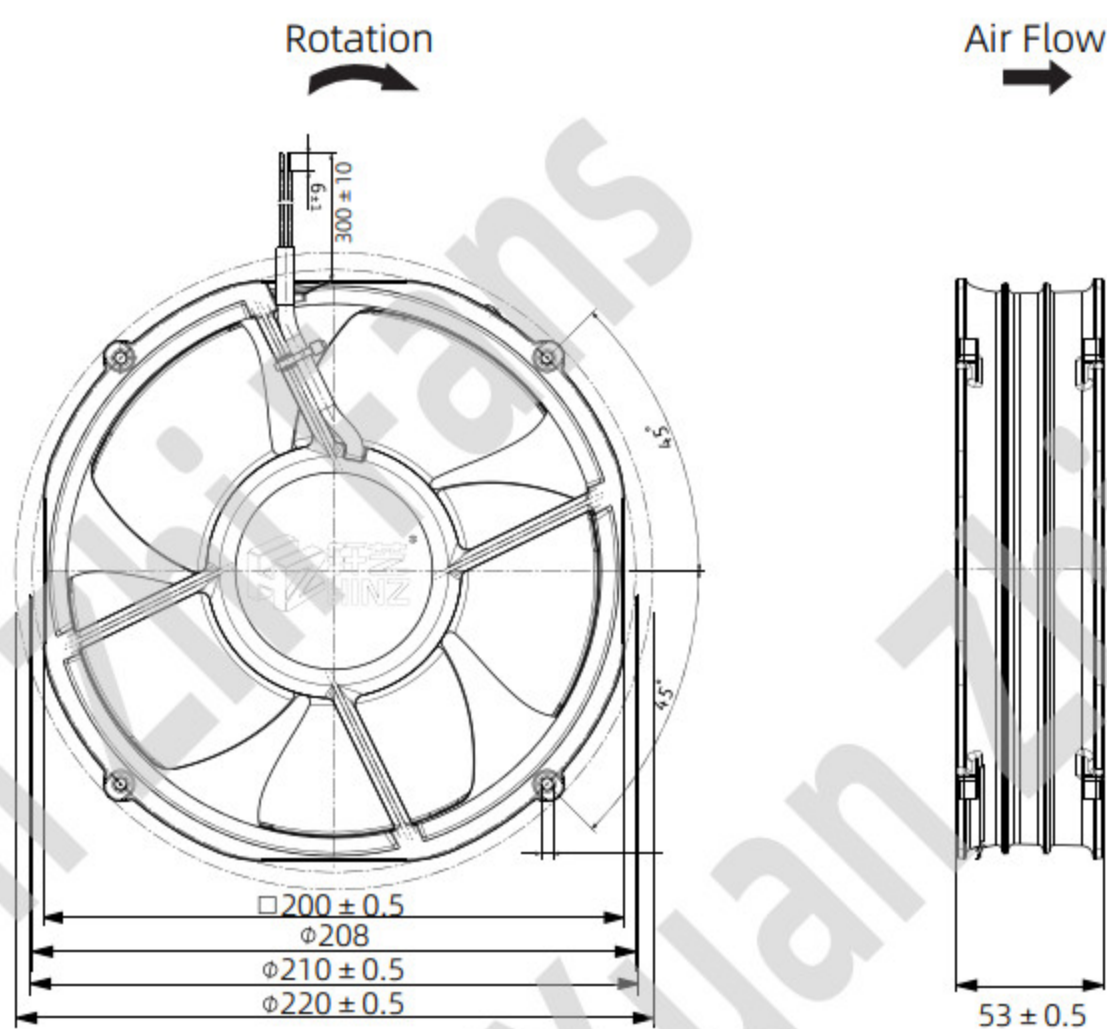

可选功能列表 Available Functions



配套产品选项  
Attachment Option



配套产品选项  
Attachment Option



| 型号<br>Model | 轴承<br>Bearing<br>System | 额定电压<br>Rated<br>Voltage | 运行电压<br>Operation<br>Voltage | 额定电流<br>Rated<br>Current | 额定转速<br>Rated Speed | 最大风量<br>Max. Air Flow |         | 最大风压<br>Max. Air Pressure |        | 噪音<br>Noise | 重量<br>Weight |
|-------------|-------------------------|--------------------------|------------------------------|--------------------------|---------------------|-----------------------|---------|---------------------------|--------|-------------|--------------|
|             |                         | VDC                      | VDC                          | A                        | RPM                 | CFM                   | m³/h    | mmH₂O                     | Pa     | dB(A)       | g            |
| XD20053B12L | B                       | 12                       | 7.0~13.5                     | 1.06                     | 2200                | 251.48                | 427.26  | 8.67                      | 84.97  | 48          | 930          |
| XD20053B12M | B                       |                          |                              | 2.38                     | 3500                | 436.32                | 741.31  | 25.25                     | 247.45 | 58.5        |              |
| XD20053B12H | B                       |                          |                              | 4.55                     | 5000                | 623.57                | 1059.45 | 50.67                     | 496.57 | 65          |              |
| XD20053B24L | B                       | 24                       | 18.0~26.5                    | 0.53                     | 2200                | 251.48                | 427.26  | 8.67                      | 84.97  | 48          |              |
| XD20053B24M | B                       |                          |                              | 1.20                     | 3500                | 436.32                | 741.31  | 25.25                     | 247.45 | 58.5        |              |
| XD20053B24H | B                       |                          |                              | 2.25                     | 5000                | 623.57                | 1059.45 | 50.67                     | 496.57 | 65          |              |
| XD20053B48L | B                       | 48                       | 36.0~54.0                    | 0.28                     | 2200                | 251.48                | 427.26  | 8.67                      | 84.97  | 48          |              |
| XD20053B48M | B                       |                          |                              | 0.60                     | 3500                | 436.32                | 741.31  | 25.25                     | 247.45 | 58.5        |              |
| XD20053B48H | B                       |                          |                              | 1.15                     | 5000                | 623.57                | 1059.45 | 50.67                     | 496.57 | 65          |              |

注：以上数据仅供参考，如有变更恕不另行通知。

Notes: Above specification is only for reference and subject to change without notice.