



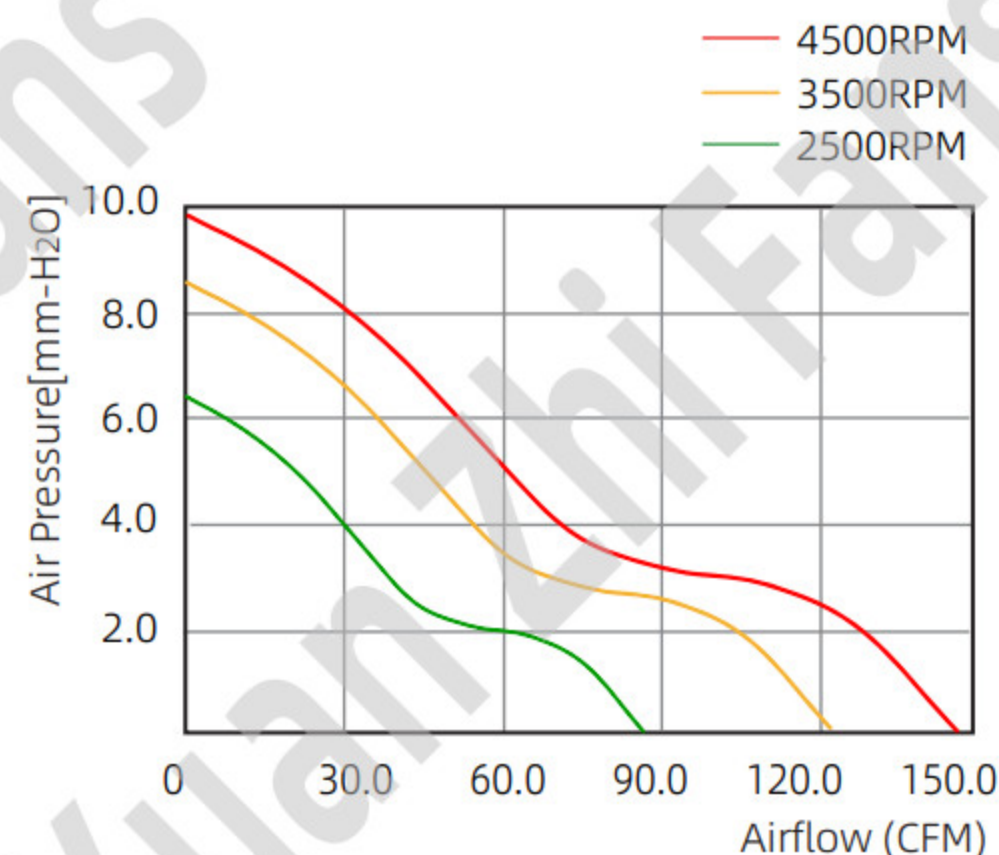

轴承结构: 滚珠轴承  
 Bearing System: Ball  
 外框材质: 环保防火PBT UL94V-0  
 Frame: Thermoplastic PBT UL94V-0  
 扇叶材质: 环保防火PBT UL94V-0  
 Impeller: Thermoplastic UL94V-0

尺寸图Dimension Drawing (Unit : mm)

P-Q 曲线图/P-Q Curve Chart

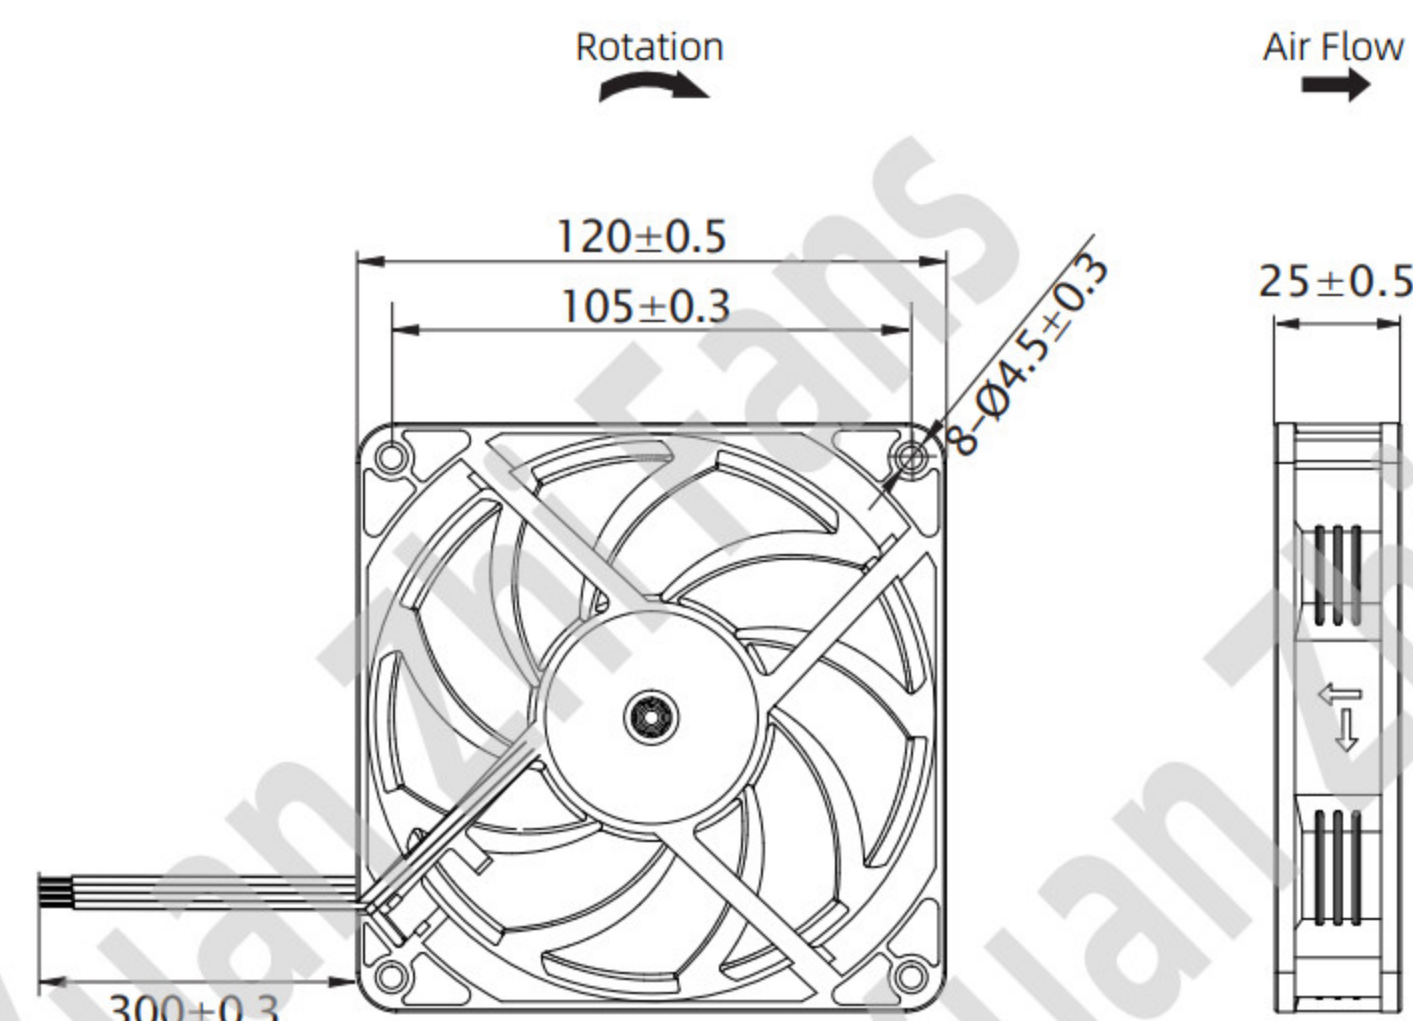

可选功能列表 Available Functions



配套产品选项 Attachment Option



配套产品选项 Attachment Option



| 型号<br>Model  | 轴承<br>Bearing System | 额定电压<br>Rated Voltage | 运行电压<br>Operation Voltage | 额定电流<br>Rated Current | 额定转速<br>Rated Speed | 最大风量<br>Max. Air Flow |                   | 最大风压<br>Max. Air Pressure |       | 噪音<br>Noise | 重量<br>Weight |
|--------------|----------------------|-----------------------|---------------------------|-----------------------|---------------------|-----------------------|-------------------|---------------------------|-------|-------------|--------------|
|              |                      | VDC                   | VDC                       | A                     | RPM                 | CFM                   | m <sup>3</sup> /h | mmH <sub>2</sub> O        | Pa    | dB(A)       | g            |
| XD12025B12LN | B                    | 12                    | 7.0~13.5                  | 0.30                  | 2500                | 87.17                 | 148.10            | 6.56                      | 64.29 | 36.0        | 165          |
| XD12025B12MN | B                    |                       |                           | 0.65                  | 3500                | 122.56                | 208.23            | 8.93                      | 87.51 | 40.0        |              |
| XD12025B12HN | B                    |                       |                           | 0.75                  | 4000                | 139.56                | 237.11            | 9.89                      | 96.92 | 43.0        |              |
| XD12025B24LN | B                    | 24                    | 18.0~26.5                 | 0.17                  | 2500                | 87.17                 | 148.10            | 6.56                      | 64.29 | 36.0        |              |
| XD12025B24MN | B                    |                       |                           | 0.38                  | 3500                | 122.56                | 208.23            | 8.93                      | 87.51 | 40.0        |              |
| XD12025B24HN | B                    |                       |                           | 0.42                  | 4000                | 139.56                | 237.11            | 9.89                      | 96.92 | 43.0        |              |

注: 以上数据仅供参考, 如有变更恕不另行通知。

Notes: Above specification is only for reference and subject to change without notice.