



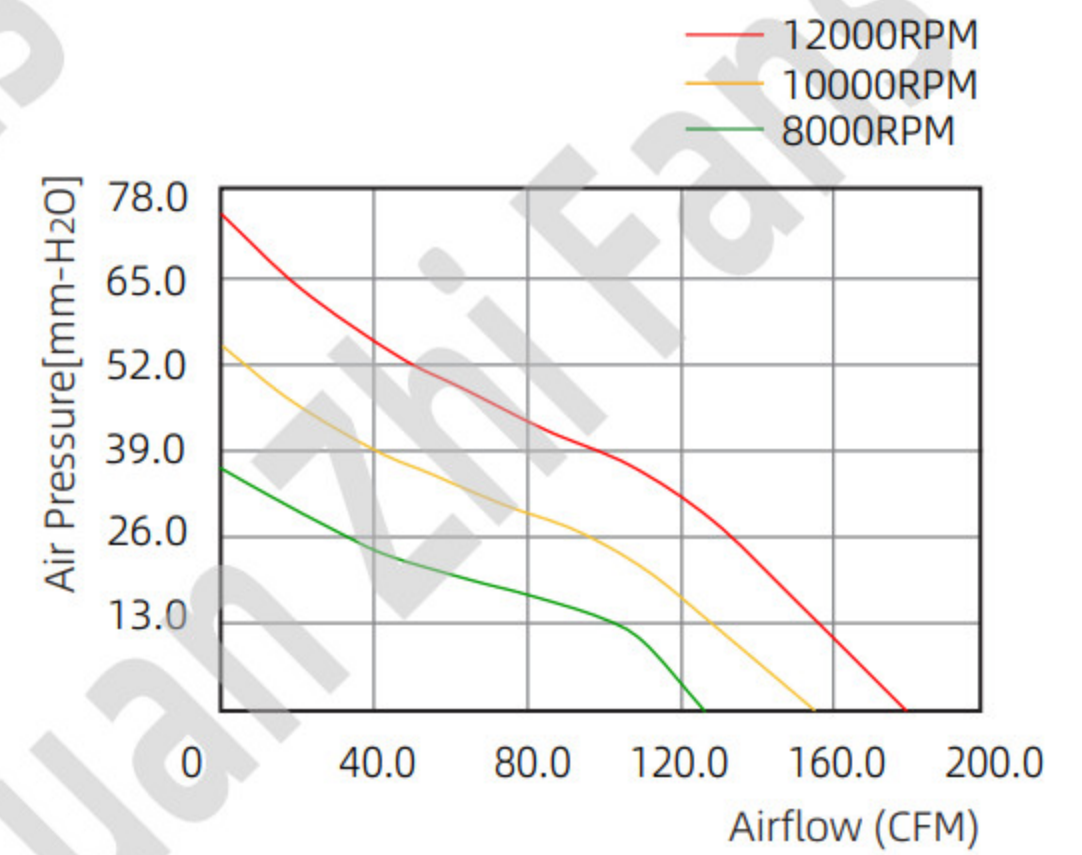

轴承结构：滚珠轴承  
Bearing System: Ball  
外框材质：环保防火PBT UL94V-0  
Frame: Thermoplastic PBT UL94V-0  
扇叶材质：环保防火PBT UL94V-0  
Impeller: Thermoplastic UL94V-0

尺寸图Dimension Drawing (Unit : mm)

P-Q 曲线图/P-Q Curve Chart

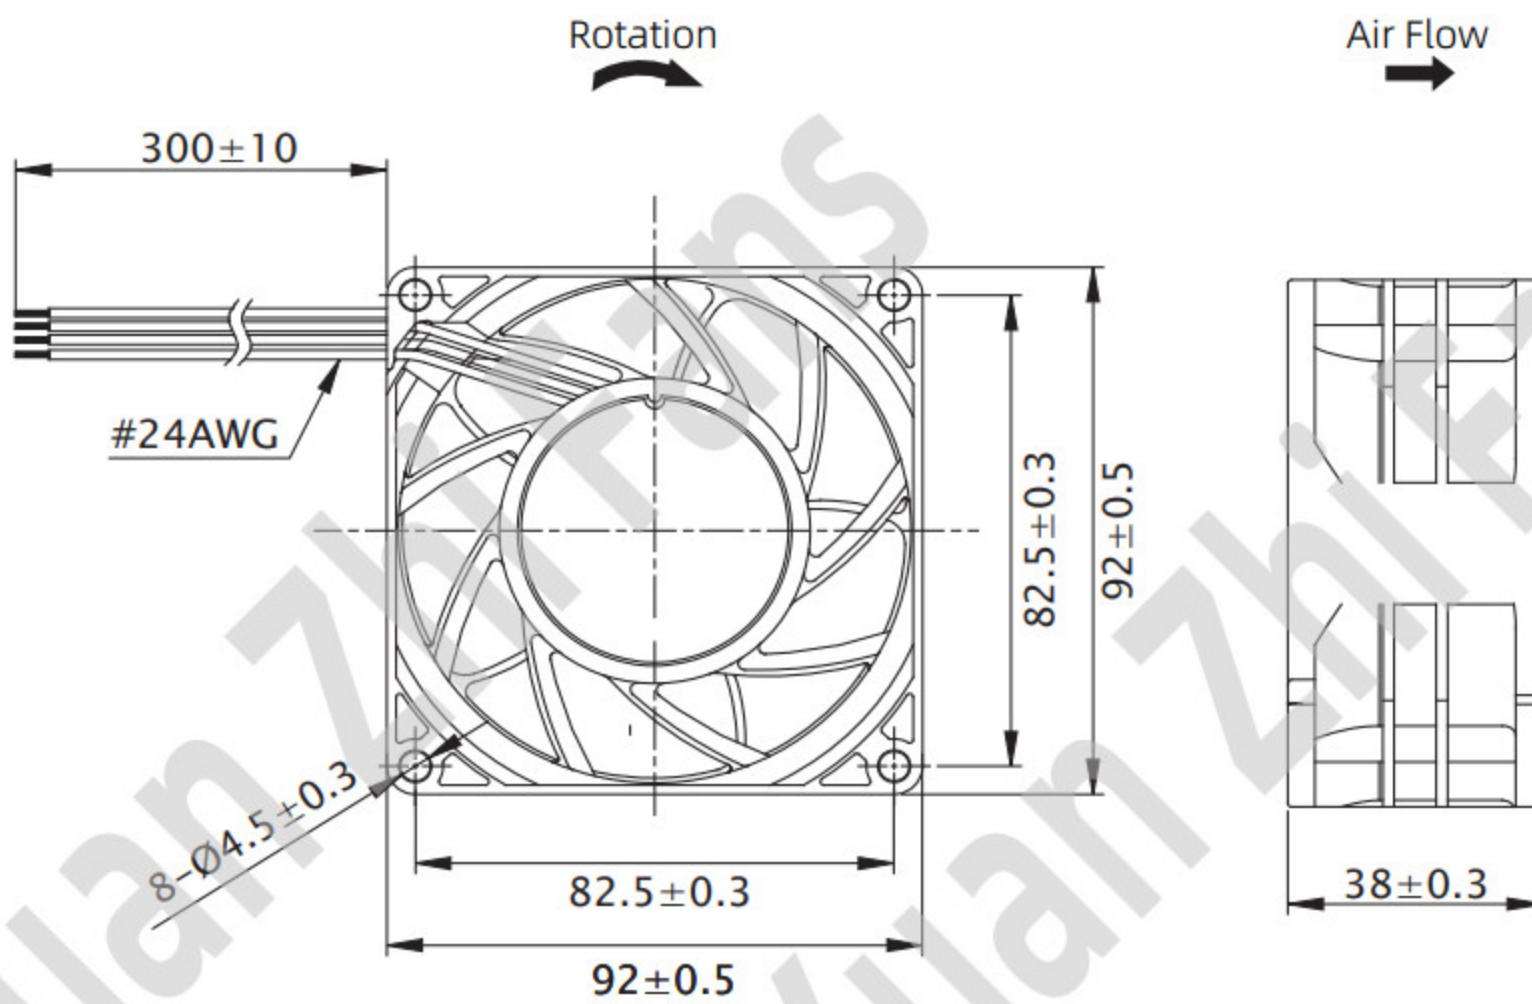

可选功能列表 Available Functions



配套产品选项  
Attachment Option

控制技术  
Control Technology



配套产品选项  
Attachment Option

风扇附件  
Fan Accessories



| 型号<br>Model  | 轴承<br>Bearing System | 额定电压<br>Rated Voltage | 运行电压<br>Operation Voltage | 额定电流<br>Rated Current | 额定转速<br>Rated Speed | 最大风量<br>Max. Air Flow |        | 最大风压<br>Max. Air Pressure |        | 噪音<br>Noise | 重量<br>Weight |
|--------------|----------------------|-----------------------|---------------------------|-----------------------|---------------------|-----------------------|--------|---------------------------|--------|-------------|--------------|
| 5叶           | Ball                 | VDC                   | VDC                       | A                     | RPM                 | CFM                   | m³/h   | mmH₂O                     | Pa     | dB(A)       | g            |
| XG9238B12L/5 | B                    | 12                    | 7.0~13.5                  | 0.80                  | 8000                | 122.72                | 208.50 | 35.35                     | 346.43 | 57          | 175          |
| XG9238B12M/5 | B                    |                       |                           | 1.50                  | 10000               | 155.13                | 263.57 | 53.83                     | 527.53 | 62          |              |
| XG9238B12H/5 | B                    |                       |                           | 2.50                  | 12000               | 178.09                | 302.57 | 70.41                     | 690.02 | 67          |              |
| XG9238B12V/5 | B                    |                       |                           | 3.50                  | 14000               | 207.66                | 352.81 | 97.26                     | 953.15 | 70          |              |
| XG9238B24L/5 | B                    | 24                    | 18.0~26.5                 | 0.40                  | 8000                | 122.72                | 208.50 | 35.35                     | 346.43 | 57          |              |
| XG9238B24M/5 | B                    |                       |                           | 0.80                  | 10000               | 155.13                | 263.57 | 53.83                     | 527.53 | 62          |              |
| XG9238B24H/5 | B                    |                       |                           | 1.50                  | 12000               | 178.09                | 302.57 | 70.41                     | 690.02 | 67          |              |
| XG9238B24V/5 | B                    |                       |                           | 2.40                  | 14000               | 207.66                | 352.81 | 97.26                     | 953.15 | 70          |              |
| XG9238B48L/5 | B                    | 48                    | 36.0~54.0                 | 0.20                  | 8000                | 122.72                | 208.50 | 35.35                     | 346.43 | 57          |              |
| XG9238B48M/5 | B                    |                       |                           | 0.30                  | 10000               | 155.13                | 263.57 | 53.83                     | 527.53 | 62          |              |
| XG9238B48H/5 | B                    |                       |                           | 0.80                  | 12000               | 178.09                | 302.57 | 70.41                     | 690.02 | 67          |              |
| XG9238B48V/5 | B                    |                       |                           | 1.20                  | 14000               | 207.66                | 352.81 | 97.26                     | 953.15 | 70          |              |

注：以上数据仅供参考，如有变更恕不另行通知。

Notes: Above specification is only for reference and subject to change without notice.