



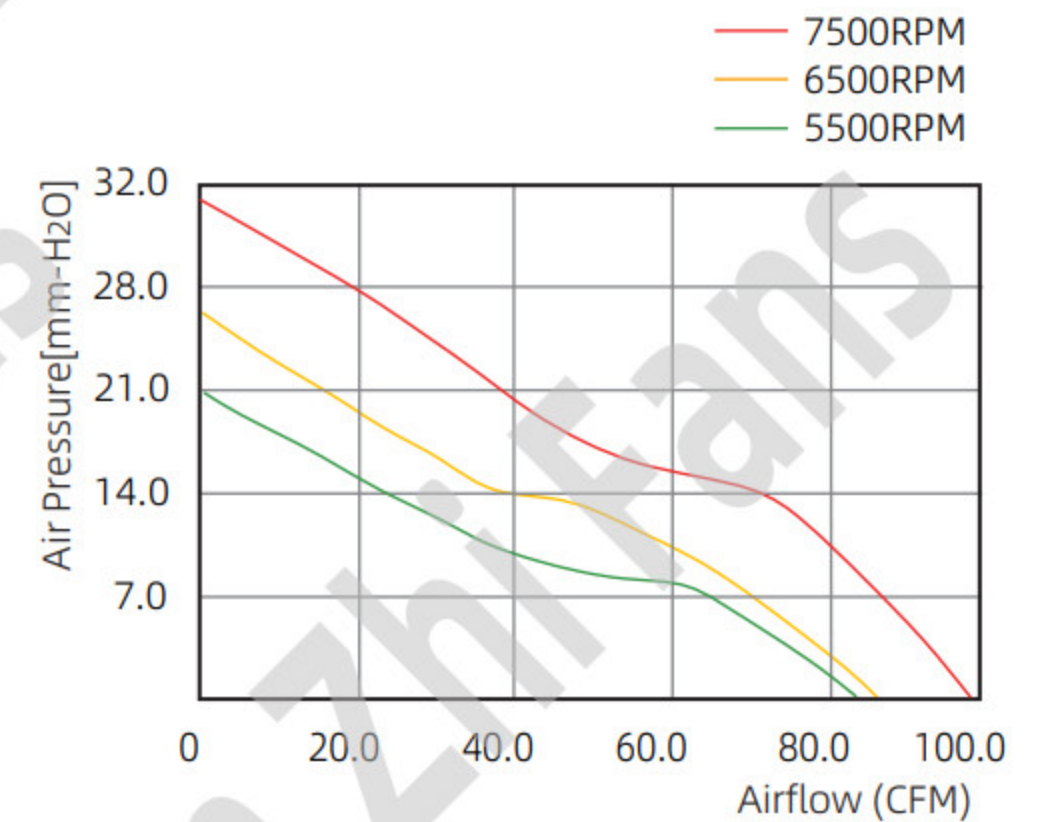

轴承结构: 滚珠轴承
Bearing System: Ball
外框材质: 环保防火PBT UL94V-0
Frame: Thermoplastic PBT UL94V-0
扇叶材质: 环保防火PBT UL94V-0
Impeller: Thermoplastic UL94V-0

尺寸图Dimension Drawing (Unit : mm)

P-Q 曲线图/P-Q Curve Chart

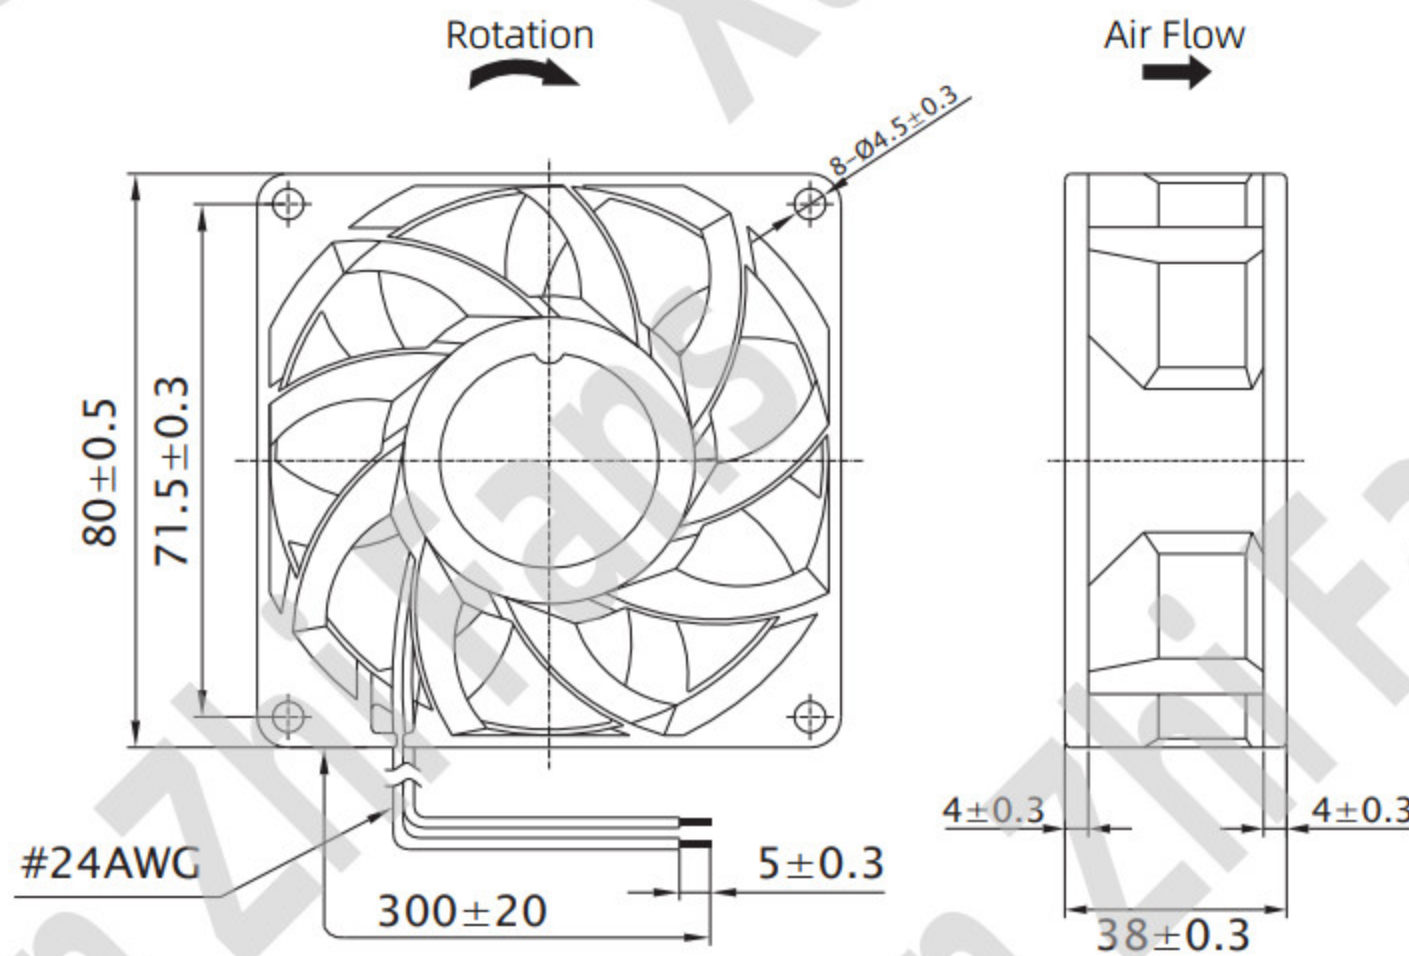

可选功能列表 Available Functions



配套产品选项 Attachment Option



配套产品选项 Attachment Option



型号 Model	轴承 Bearing System	额定电压 Rated Voltage	运行电压 Operation Voltage	额定电流 Rated Current	额定转速 Rated Speed	最大风量 Max. Air Flow		最大风压 Max. Air Pressure		噪音 Noise	重量 Weight
70叶	Ball	VDC	VDC	A	RPM	CFM	m³/h	mmH₂O	Pa	dB(A)	g
XG8038B12L	B	12	7.0~13.5	0.22	3500	51.74	87.91	8.21	80.46	42	160
XG8038B12M	B			0.36	4500	67.92	115.40	14.56	142.69	47	
XG8038B12H	B			0.65	5500	83.71	142.22	21.13	207.07	54	
XG8038B12V	B			0.90	6500	86.44	146.86	27.59	270.38	58	
XG8038B12E	B			1.40	7500	99.41	168.90	40.51	397.00	60	
XG8038B12S	B			1.65	8500	111.87	190.07	47.62	466.68	61	
XG8038B12P	B			2.50	10000	127.19	216.10	57.71	565.56	64	
XG8038B24L	B	24	18.0~26.5	0.10	3500	51.74	87.91	8.21	80.46	42	
XG8038B24M	B			0.18	4500	67.92	115.40	14.56	142.69	47	
XG8038B24H	B			0.30	5500	83.71	142.22	21.13	207.07	54	
XG8038B24V	B			0.55	6500	86.44	146.86	27.59	270.38	58	
XG8038B24E	B			0.70	7500	99.41	168.90	40.51	397.00	60	
XG8038B24S	B			0.85	8500	111.87	190.07	47.62	466.68	61	
XG8038B24P	B			1.25	10000	127.19	216.10	57.71	565.56	64	
XG8038B48L	B	48	36.0~54.0	0.07	3500	51.74	87.91	8.21	80.46	42	
XG8038B48M	B			0.10	4500	67.92	115.40	14.56	142.69	47	
XG8038B48H	B			0.17	5500	83.71	142.22	21.13	207.07	54	
XG8038B48V	B			0.28	6500	86.44	146.86	27.59	270.38	58	
XG8038B48E	B			0.35	7500	99.41	168.90	40.51	397.00	60	
XG8038B48S	B			0.41	8500	111.87	190.07	47.62	466.68	61	
XG8038B48P	B			0.62	10000	127.19	216.10	57.71	565.56	64	

注: 以上数据仅供参考, 如有变更恕不另行通知。

Notes: Above specification is only for reference and subject to change without notice.