



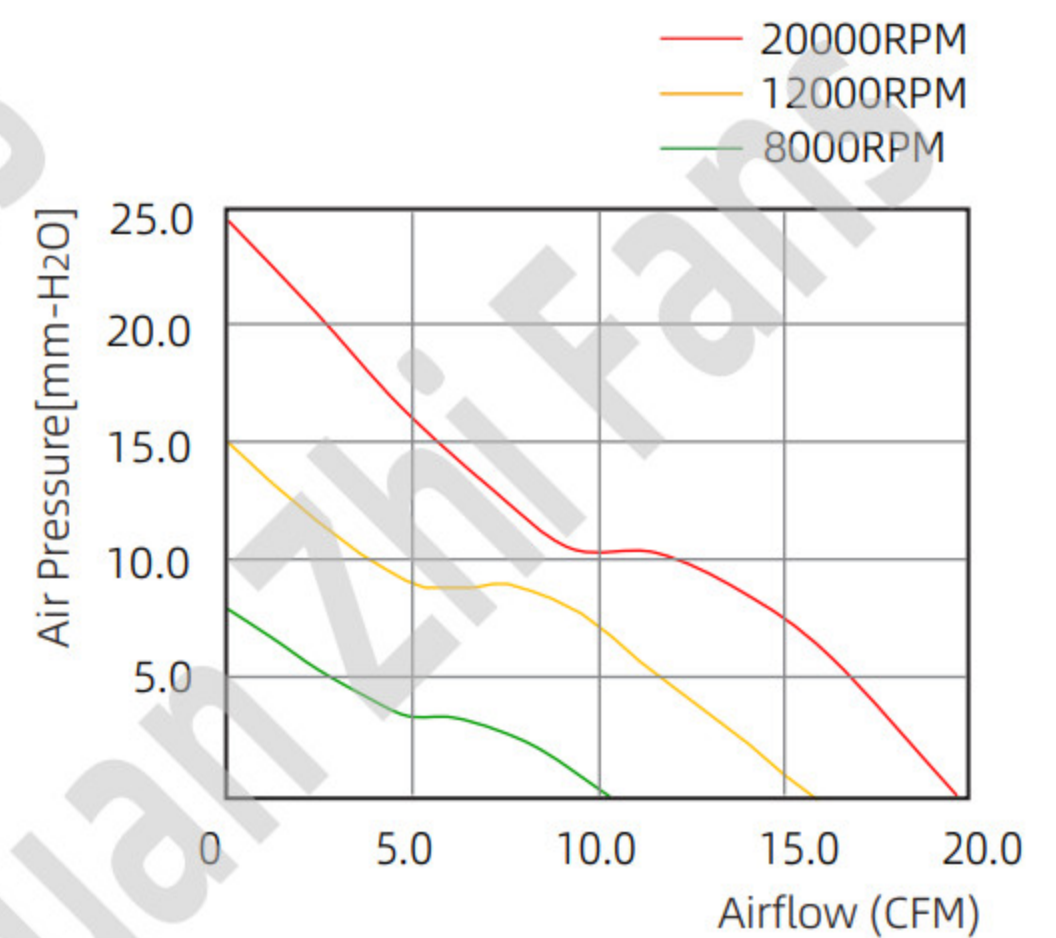

轴承结构：滚珠轴承
Bearing System: Ball
外框材质：环保防火PBT UL94V-0
Frame: Thermoplastic PBT UL94V-0
扇叶材质：环保防火PBT UL94V-0
Impeller: Thermoplastic UL94V-0

尺寸图Dimension Drawing (Unit : mm)

P-Q 曲线图/P-Q Curve Chart

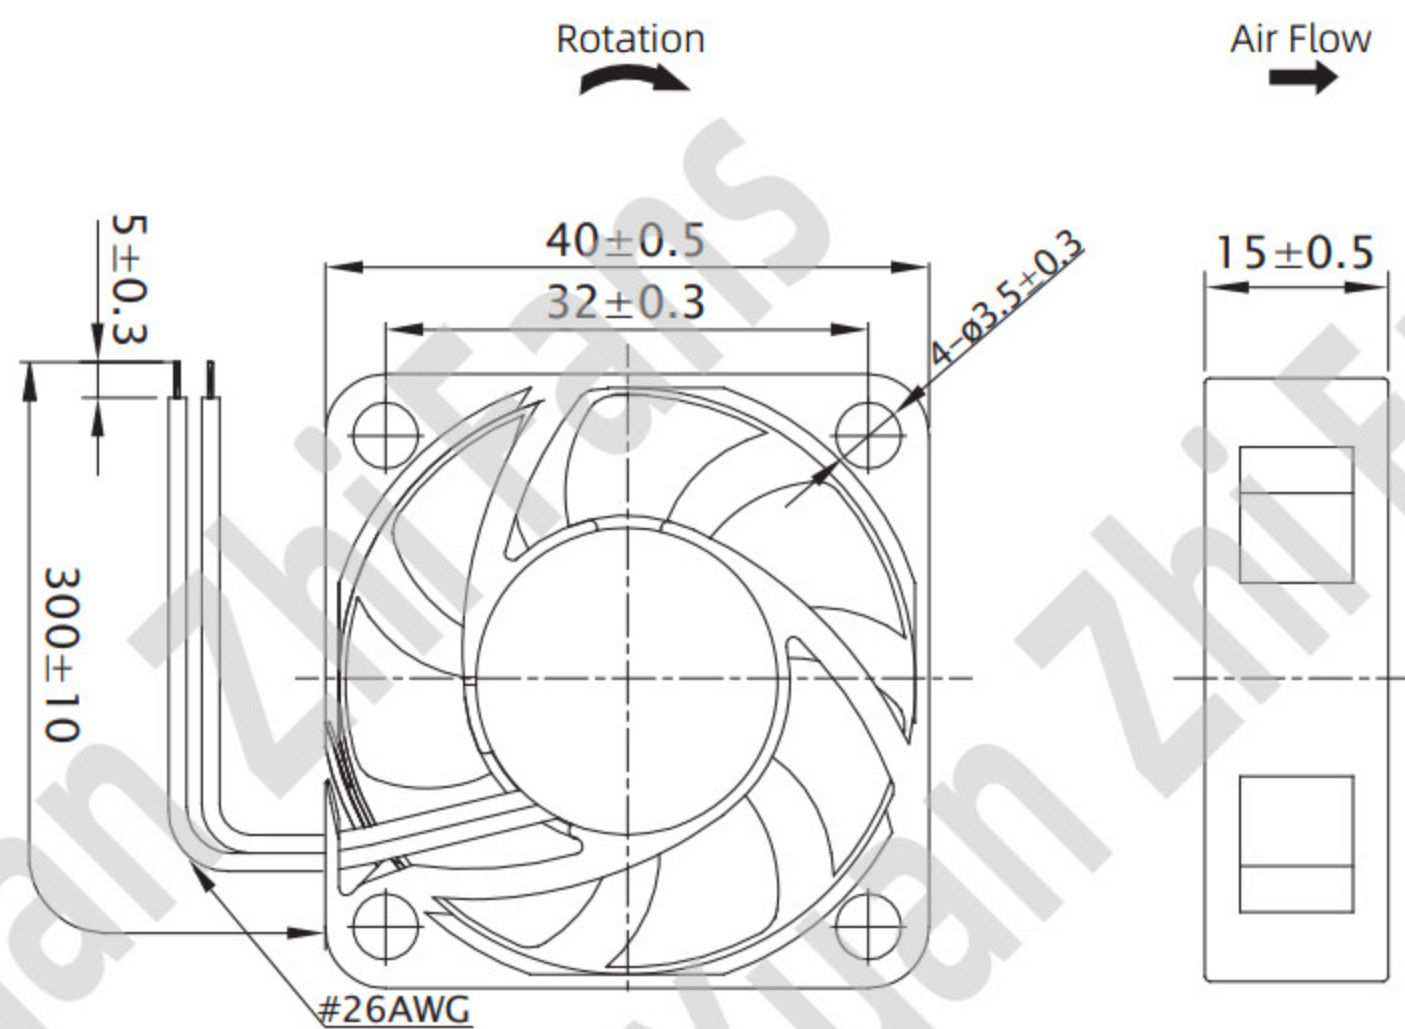

可选功能列表 Available Functions



配套产品选项
Attachment Option

控制技术
Control Technology



配套产品选项
Attachment Option

风扇辅件
Fan Accessories



型号 Model	轴承 Bearing System	额定电压 Rated Voltage	运行电压 Operation Voltage	额定电流 Rated Current	额定转速 Rated Speed	最大风量 Max. Air Flow		最大风压 Max. Air Pressure		噪音 Noise	重量 Weight
	Ball	VDC	VDC	A	RPM	CFM	m ³ /h	mmH ₂ O	Pa	dB(A)	g
XD4015B05L	B	5	3.5~5.5	0.15	6000	7.56	12.84	4.87	47.73	26.8	25
XD4015B05M	B			0.23	8000	10.07	17.11	7.92	77.62	34.0	
XD4015B05H	B			0.40	10000	13.10	22.26	11.96	117.21	41.0	
XD4015B12L	B	12	7.0~13.5	0.07	6000	7.56	12.84	4.87	47.73	26.8	
XD4015B12M	B			0.10	8000	10.07	17.11	7.92	77.62	34.0	
XD4015B12H	B			0.16	10000	13.10	22.26	11.96	117.21	41.0	
XD4015B12V	B			0.30	12000	14.82	25.18	16.89	165.52	45.2	
XD4015B12E	B			0.35	14000	16.83	28.59	20.65	202.37	48.0	
XD4015B12S	B			0.40	20000	19.64	33.37	24.89	243.92	51.0	
XD4015B24L	B	24	18.0~26.5	0.04	6000	7.56	12.84	4.87	47.73	26.8	
XD4015B24M	B			0.05	8000	10.07	17.11	7.92	77.62	34.0	
XD4015B24H	B			0.08	10000	13.10	22.26	11.96	117.21	41.0	
XD4015B24V	B			0.15	12000	14.82	25.18	16.89	165.52	45.2	
XD4015B24E	B			0.18	14000	16.83	28.59	20.65	202.37	48.0	
XD4015B24S	B			0.20	20000	19.64	33.37	24.89	243.92	51.0	

注：以上数据仅供参考，如有变更恕不另行通知。

Notes: Above specification is only for reference and subject to change without notice.