


P-Q 曲线图/P-Q Curve Chart

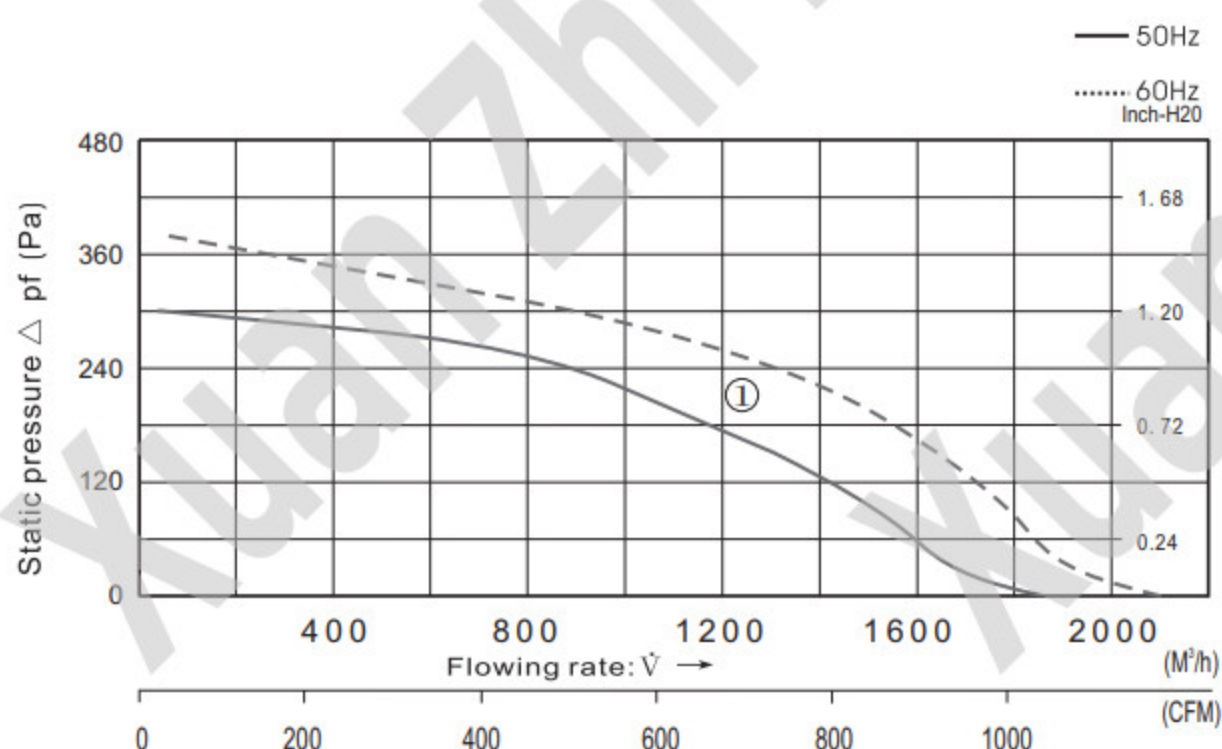


风机类型: 后倾式离心风机
材 质: PA尼龙
出风方向: 转子顺时针方向
电机保护: 热保护器
绝缘等级: F
防护等级: IP44
环境温度: -25°C~60°C

Fan type: centrifugal fan
Material: Polyamide
Outlet direction: Rotor timing direction
Motor protection: thermal protector
Insulation class: F
Class of protection: IP44
Ambient temperature: -25°C~60°C

型号	电压	频率	电流	输入功率	转速	最大风量		最大静压	噪音	电容
Model	Voltage	Frequency	Current	Input power	Speed	Max. Air Flow		Max. Static pressure	Noise	Capacitor
Part no.	V	HZ	AMP	W	R/min	CFM	m ³ /h	Pa	dB(A)	μF
XZ2S325B-H102-154	115	50/60	1.10/1.55	123/178	1380/1550	1103/1233	1873/2095	352/441	66/69	12.0/250V
XZ2E325B-H102-154	230	50/60	0.54/0.8	123/178	1380/1550	1103/1233	1873/2095	352/441	66/69	4.0/450V
XZ4D325B-H102-154	380	50/60	0.34/0.32	123/178	1380/1550	1103/1233	1873/2095	352/441	66/69	—

尺寸图Dimension Drawing (Unit : mm)

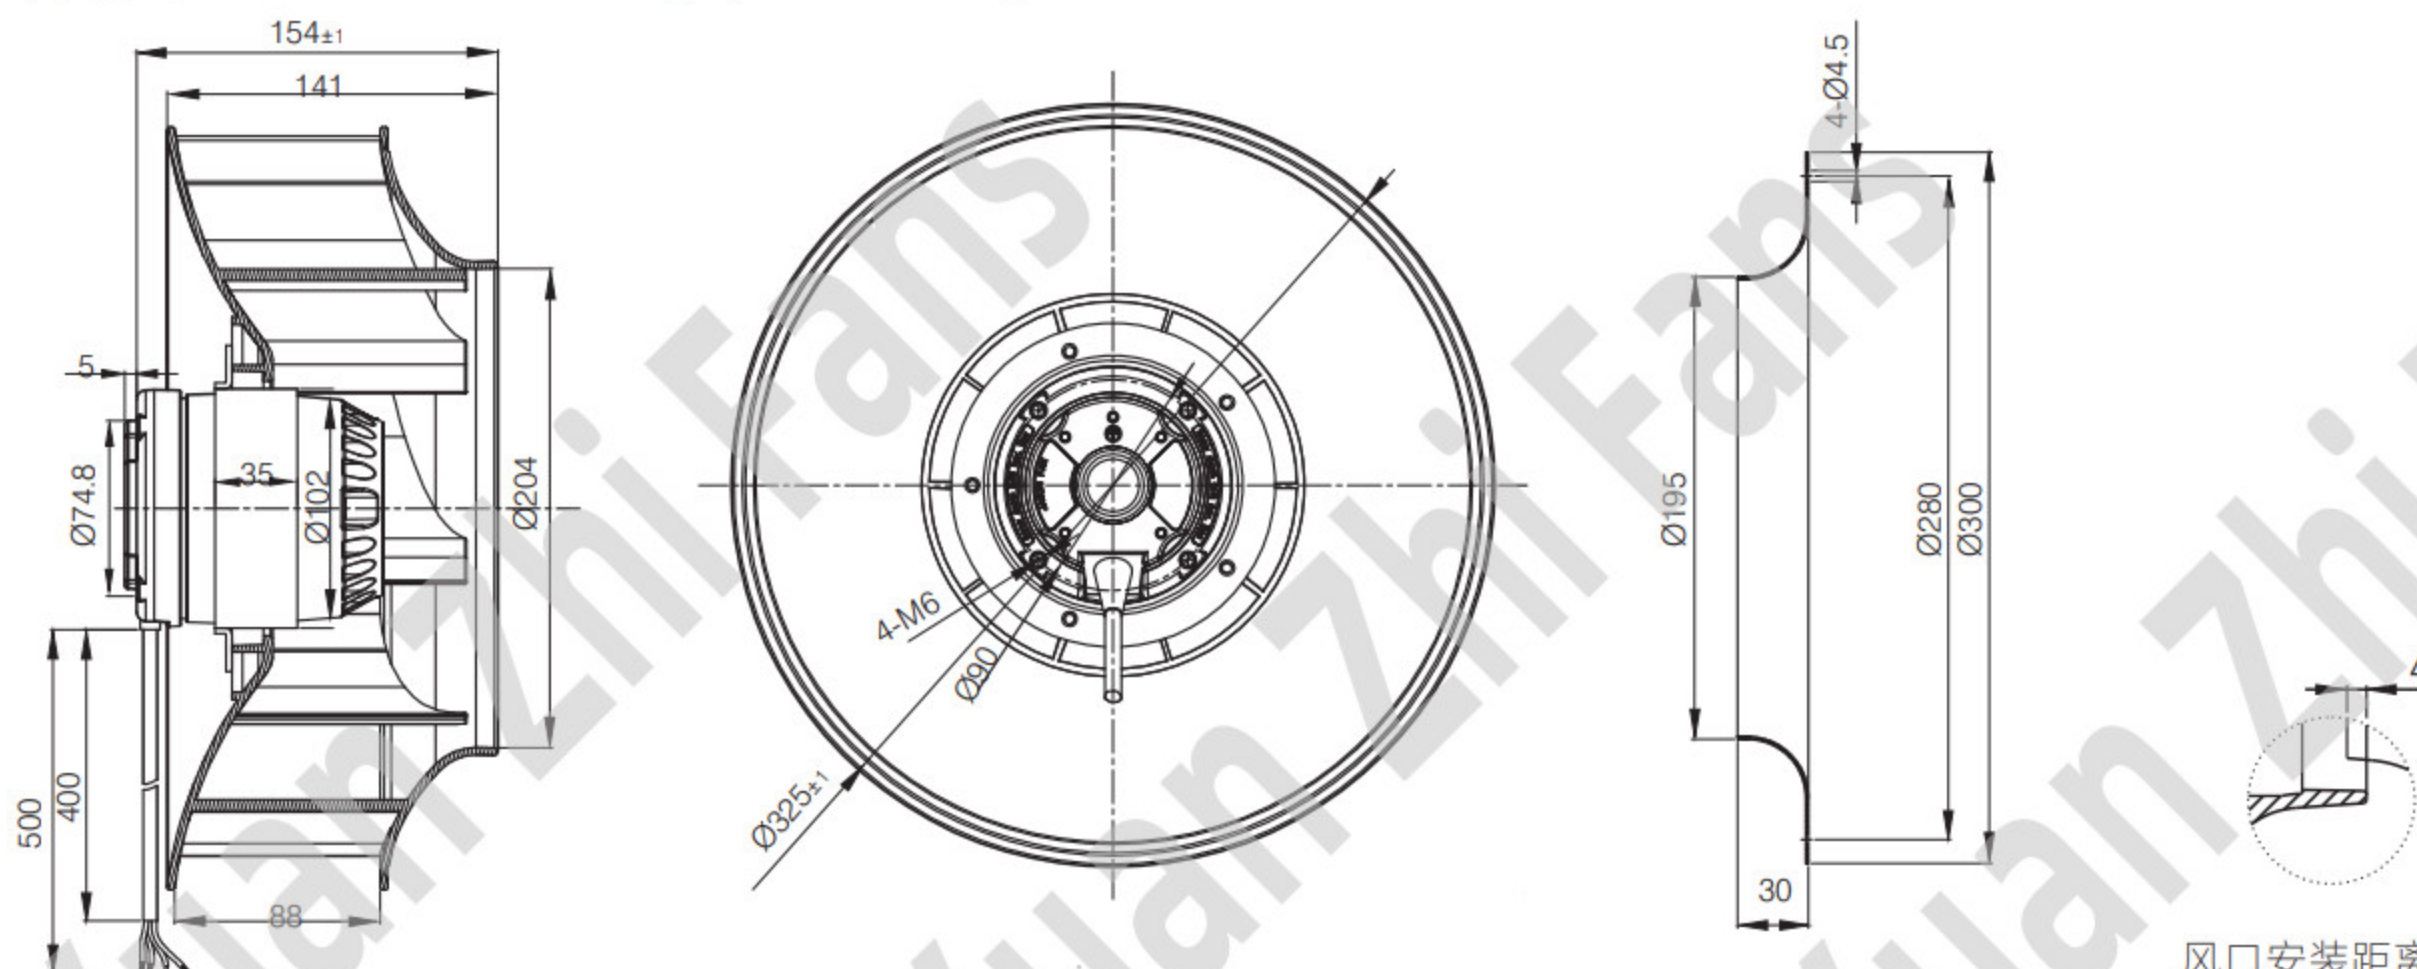

导风圈 (附件)
Inlet ring (accessory)

风口安装距离
Installation distance
between fan and inlet ring

■ 注: 以上数据仅供参考, 如有变更恕不另行通知。

Notes: Above specification is only for reference and subject to change without notice.

AC Axial fan
AC轴流风机

EC Axial fan
EC轴流风机

DC Axial fan
DC轴流风机

AC Centrifugal fan
AC离心风机

EC Centrifugal fan
EC离心风机

AC External rotor fan
AC外转子风机

Fan filter
风扇过滤器

Governor/Voltage Regulator
调速器&调压器

Temperature control products
温控产品

Accessories
附件