

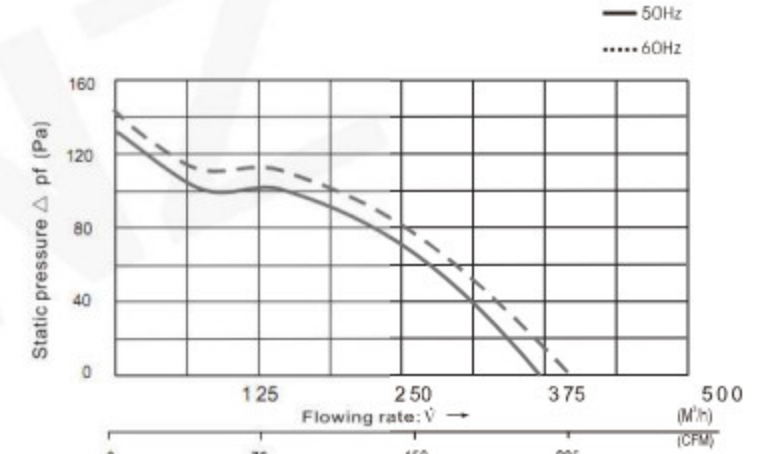




配套产品选项
Attachment Option

控制技术
Control Technology



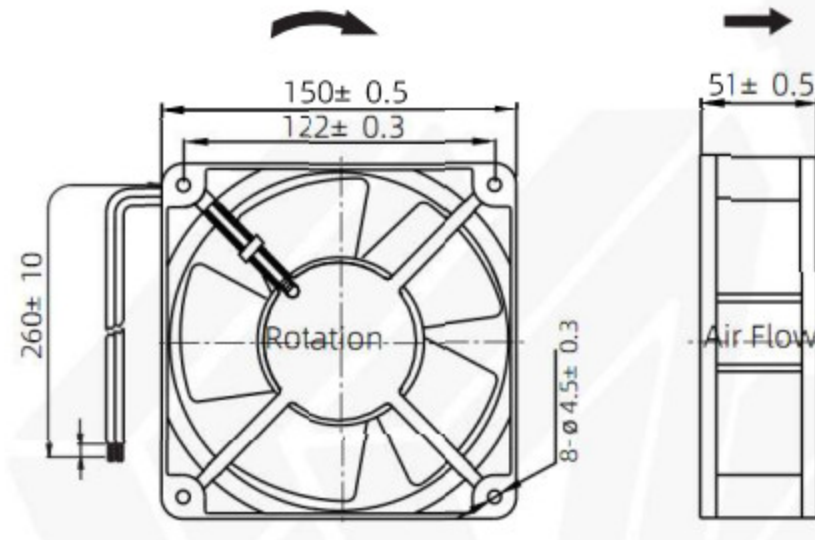


配套产品选项
Attachment Option

控制技术
Control Technology



型号 Model	轴承 Bearing System	额定电压 Rated Voltage	额定频率 Rated Frequency	额定电流 Rated Current	额定功率 Rated Power	额定转速 Rated Speed	最大风量 Max. Air Flow		最大风压 Max. Air Pressure		噪音 Noise	重量 Weight
Part no.	Ball	VAC	Hz	A	W	RPM	CFM	m³/h	mmH₂O	Pa	dB(A)	g
XZ15050HBL1	B	115	50/60	0.64/0.57	36/31	2700/3050	205/224	380.58	14.73	144	48/51	840
XZ15050HBL2	B	230	50/60	0.22/0.21	37/30	2700/3050	205/224	380.58	14.73	144	48/51	
XZ15050HBL3	B	380	50/60	0.13/0.12	37/33	2700/3050	205/224	380.58	14.73	144	48/51	

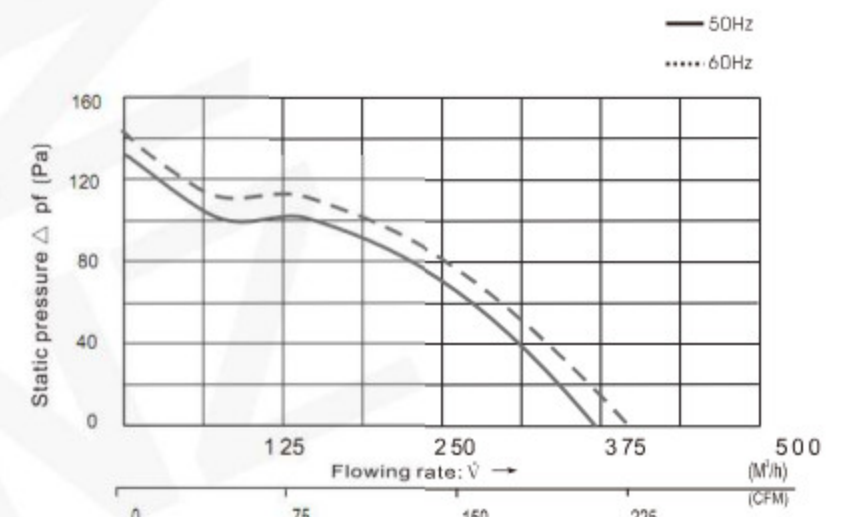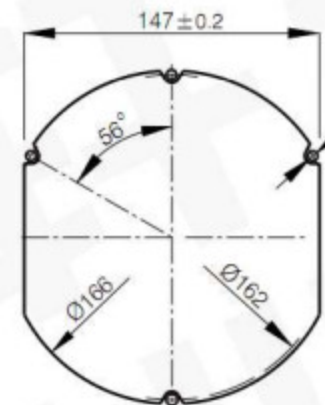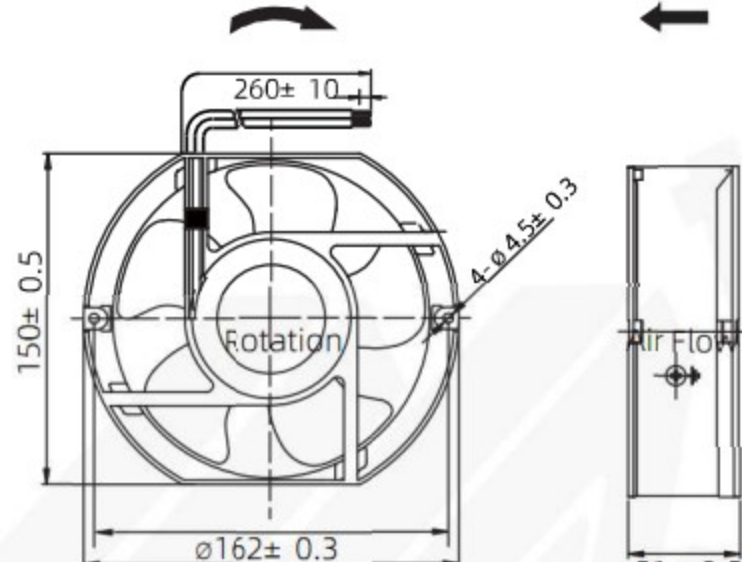


配套产品选项
Attachment Option

控制技术
Control Technology



配套产品选项
Attachment Option

控制技术
Control Technology

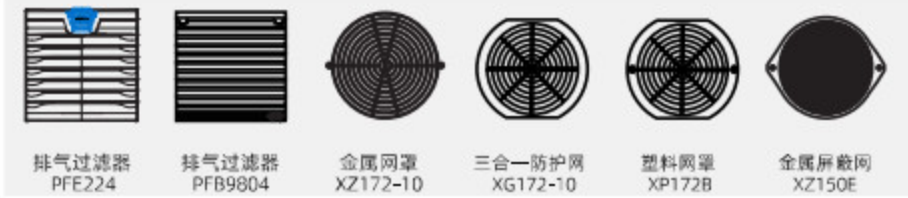

型号 Model	轴承 Bearing System	额定电压 Rated Voltage	额定频率 Rated Frequency	额定电流 Rated Current	额定功率 Rated Power	额定转速 Rated Speed	最大风量 Max. Air Flow		最大风压 Max. Air Pressure		噪音 Noise	重量 Weight
Part no.	Ball	VAC	Hz	A	W	RPM	CFM	m³/h	mmH₂O	Pa	dB(A)	g
XZ17250HBL1	B	115	50/60	0.64/0.57	36/31	2700/3050	205/224	380.58	14.73	144	48/51	850
XZ17250HBL2	B	230	50/60	0.22/0.21	37/30	2700/3050	205/224	380.58	14.73	144	48/51	850
XZ17250HBL3	B	380	50/60	0.13/0.12	37/33	2700/3050	205/224	380.58	14.73	144	48/51	850

注: 以上数据仅供参考, 如有变更恕不另行通知。

Notes: Above specification is only for reference and subject to change without notice.