

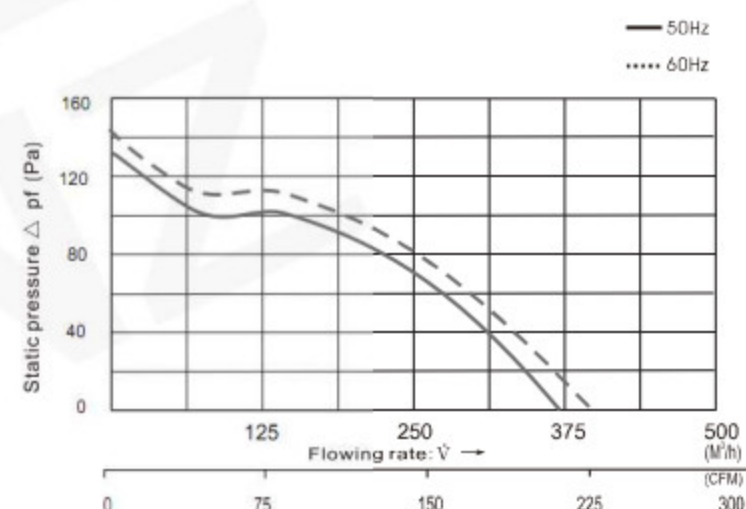



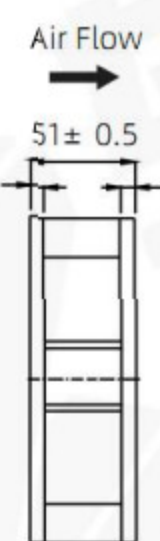

轴承结构: 滚珠轴承 Bearing System: Ball
外框材质: 铝合金 Frame: Aluminum Alloy
扇叶材质: 金属叶轮 Impeller: Metal Impellers

配套产品选项
Attachment Option

控制技术
Control Technology



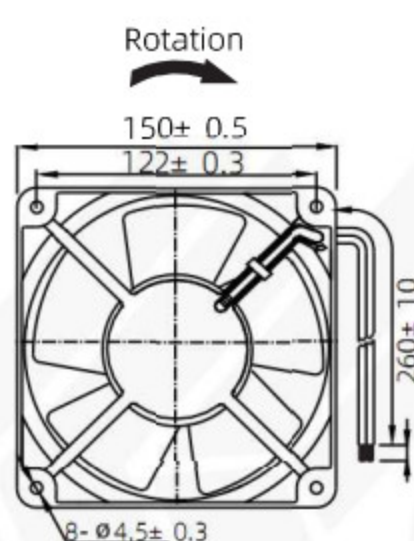


配套产品选项
Attachment Option

控制技术
Control Technology



型号 Model	轴承 Bearing System	额定电压 Rated Voltage	额定频率 Rated Frequency	额定电流 Rated Current	额定功率 Rated Power	额定转速 Rated Speed	最大风量 Max. Air Flow		最大风压 Max. Air Pressure		噪音 Noise	重量 Weight
Part no.	Ball	VAC	Hz	A	W	RPM	CFM	m³/h	mmH₂O	Pa	dB(A)	g
XZ15050HBL1A	B	230	50/60	0.54/0.50	39/36	2650/2950	205/224	380.58	14.73	144	51/53	928
XZ15050HBL2A	B	230	50/60	0.31/0.25	39/36	2650/2950	205/224	380.58	14.73	144	51/53	
XZ15050HBL3A	B	380	50/60	0.15/0.12	39/36	2650/2950	205/224	380.58	14.73	144	51/53	

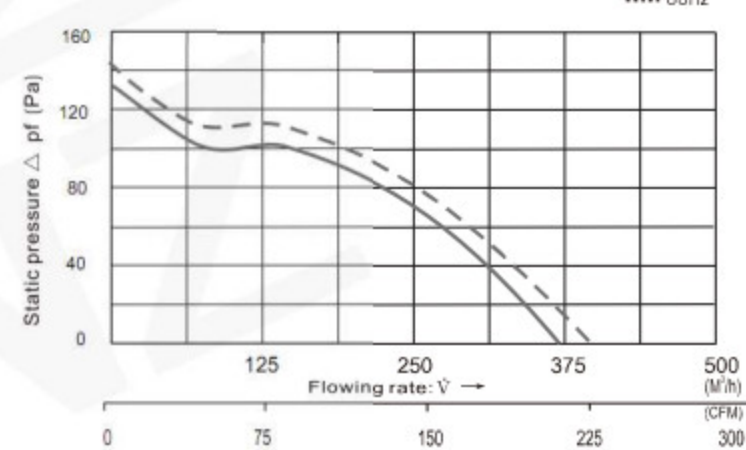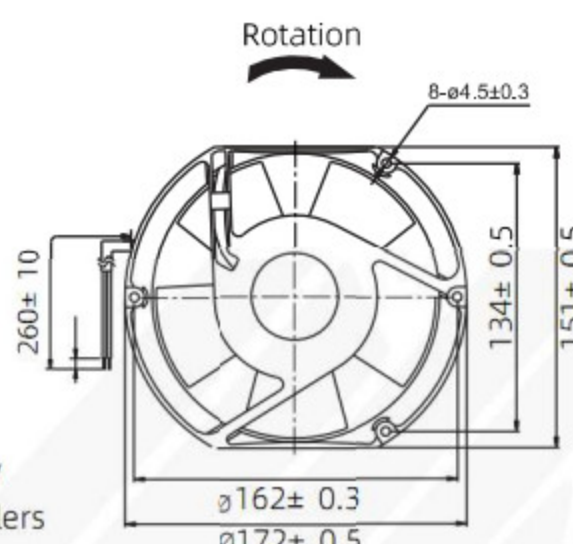

轴承结构: 滚珠轴承 Bearing System: Ball
外框材质: 铝合金 Frame: Aluminum Alloy
扇叶材质: 金属叶轮 Impeller: Metal Impellers

配套产品选项
Attachment Option

控制技术
Control Technology



配套产品选项
Attachment Option

控制技术
Control Technology



型号 Model	轴承 Bearing System	额定电压 Rated Voltage	额定频率 Rated Frequency	额定电流 Rated Current	额定功率 Rated Power	额定转速 Rated Speed	最大风量 Max. Air Flow		最大风压 Max. Air Pressure		噪音 Noise	重量 Weight
Part no.	Ball	VAC	Hz	A	W	RPM	CFM	m³/h	mmH₂O	Pa	dB(A)	g
XZ17250HBL1A	B	115	50/60	0.54/0.50	36/31	2600/2800	205/224	380.58	14.73	144	51/53	905
XZ17250HBL2A	B	230	50/60	0.27/0.25	36/31	2600/2800	205/224	380.58	14.73	144	51/53	
XZ17250HBL3A	B	380	50/60	0.18/0.16	36/31	2600/2800	205/224	380.58	14.73	144	51/53	

注: 以上数据仅供参考, 如有变更恕不另行通知。

Notes: Above specification is only for reference and subject to change without notice.