



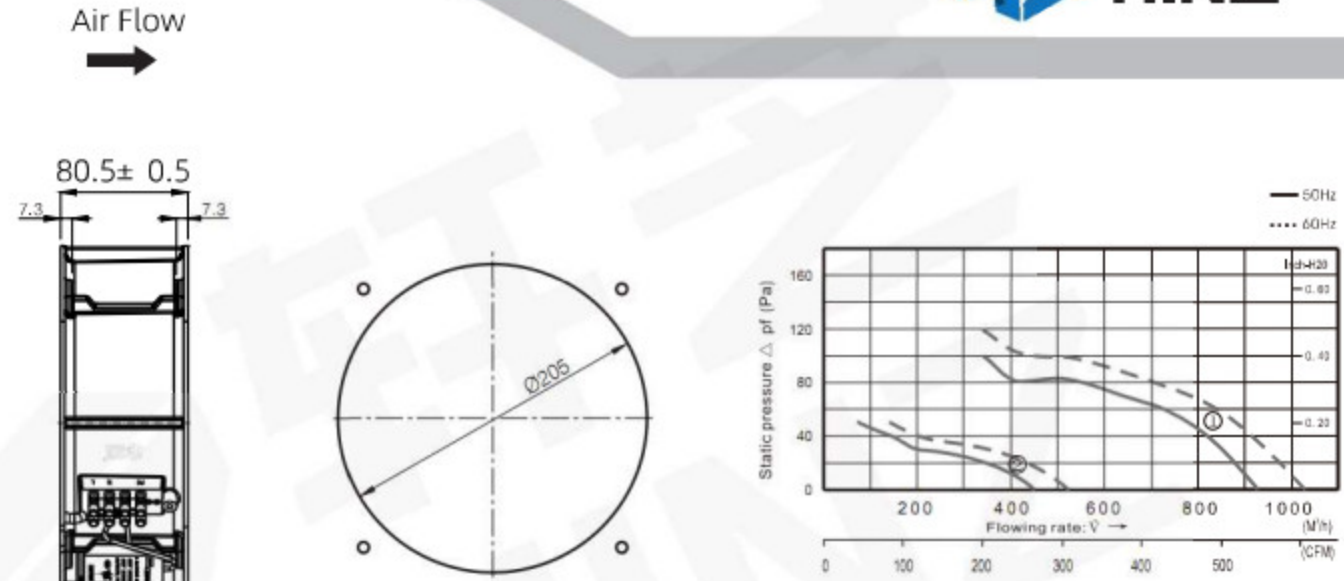

轴承结构: 滚珠轴承 Bearing System: Ball
 外框材质: 铝合金 Frame: Aluminum Alloy
 扇叶材质: 金属叶轮 Impeller: Metal Impellers



配套产品选项 Attachment Option

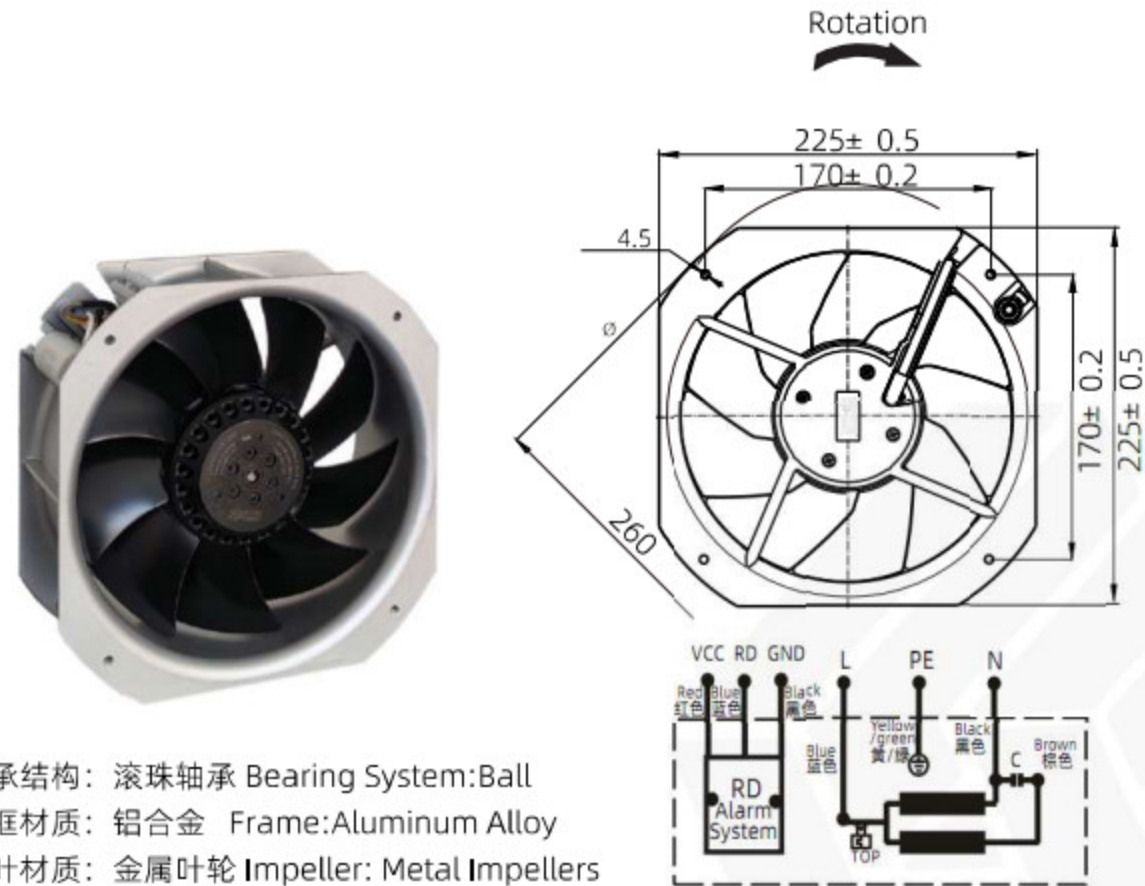

配套产品选项 Attachment Option



型号 Model	轴承 Bearing System	额定电压 Rated Voltage	额定频率 Rated Frequency	额定电流 Rated Current	额定功率 Rated Power	额定转速 Rated Speed	最大风量 Max. Air Flow		最大风压 Max. Air Pressure		噪音 Noise	重量 Weight
Part no.	Ball	VAC	Hz	A	W	RPM	CFM	m³/h	mmH₂O	Pa	dB(A)	g
XZ22580HBT1R	B	115	50/60	0.64/0.60	58/64	2470/2650	608	1032.99	12.24	120	59/61	2100
XZ22580HBT2R	B	230	50/60	0.29/0.31	63/79	2500/2800	608	1032.99	12.24	120	59/61	
XZ22580HBT3R	B	380	50/60	0.17/0.19	60/70	2500/2800	608	1032.99	12.24	120	59/61	

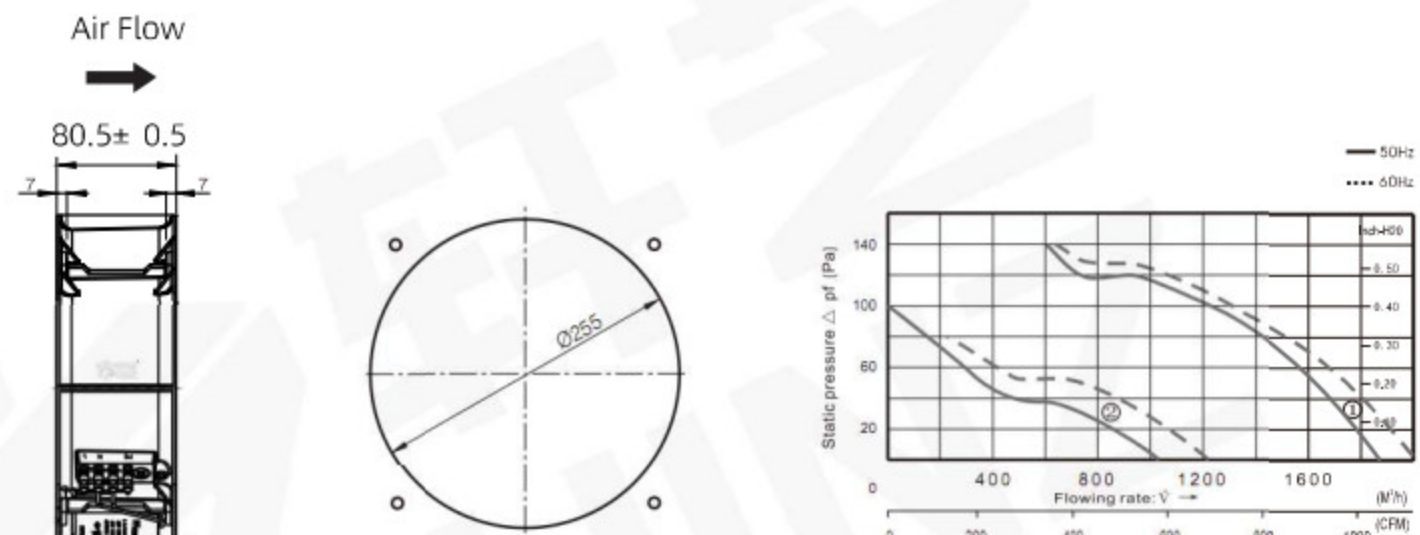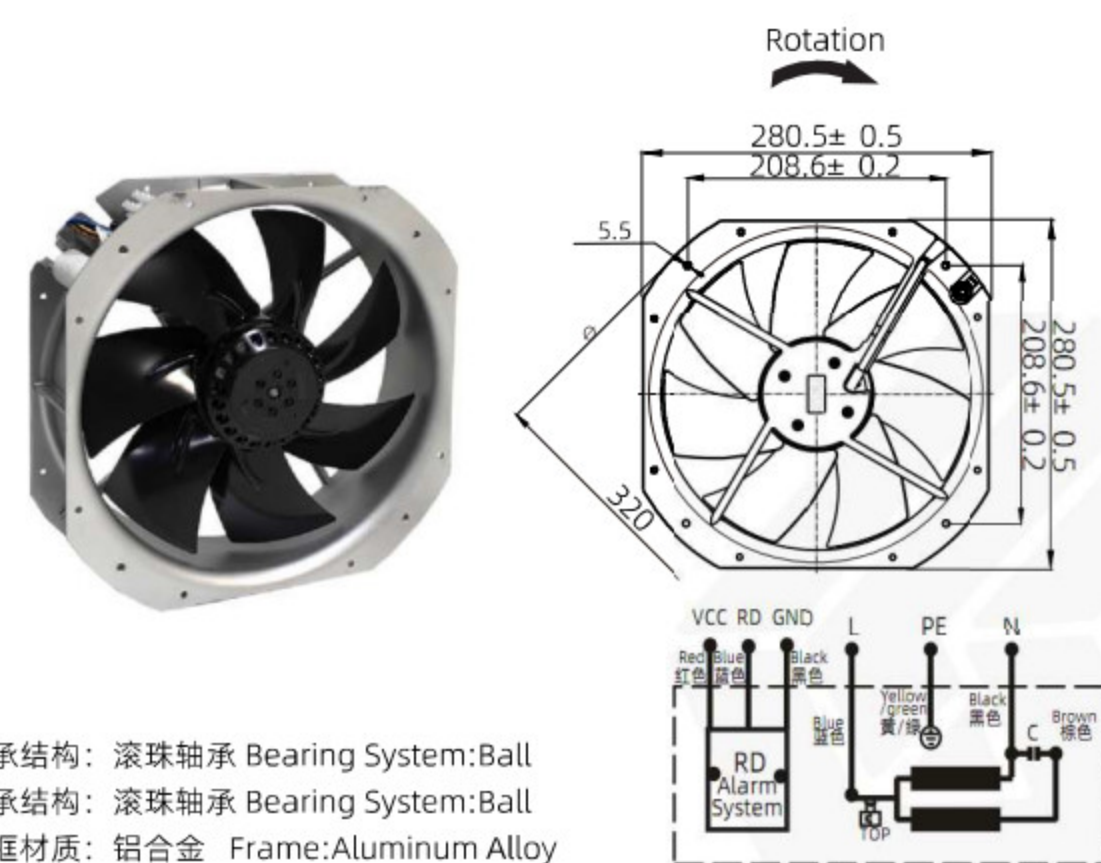

轴承结构: 滚珠轴承 Bearing System: Ball
 轴承结构: 滚珠轴承 Bearing System: Ball
 外框材质: 铝合金 Frame: Aluminum Alloy

配套产品选项 Attachment Option



配套产品选项 Attachment Option



型号 Model	轴承 Bearing System	额定电压 Rated Voltage	额定频率 Rated Frequency	额定电流 Rated Current	额定功率 Rated Power	额定转速 Rated Speed	最大风量 Max. Air Flow		最大风压 Max. Air Pressure		噪音 Noise	重量 Weight
Part no.	Ball	VAC	Hz	A	W	RPM	CFM	m³/h	mmH₂O	Pa	dB(A)	g
XZ28080HBT1R	B	115	50/60	1.06/1.20	108/145	2500/2700	1150	1953.85	14.29	140	69/70	2700
XZ28080HBT2R	B	230	50/60	0.48/0.60	110/145	2550/2800	1150	1953.85	14.29	140	69/70	
XZ28080HBT3R	B	380	50/60	0.29/0.39	110/150	2550/2800	1150	1953.85	14.29	140	69/70	

注: 以上数据仅供参考, 如有变更恕不另行通知。

Notes: Above specification is only for reference and subject to change without notice.