





可选功能列表 Available Functions

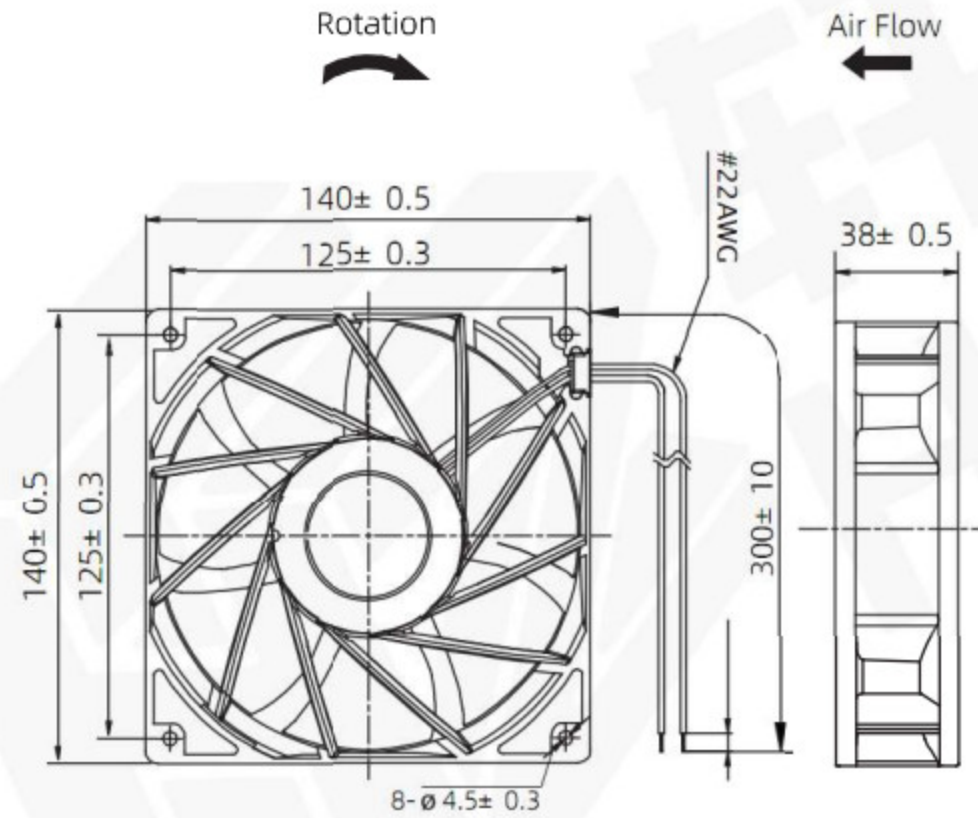

轴承结构: 滚珠轴承
Bearing System: Ball
外框材质: 环保防火PBT UL94V-0
Frame: Thermoplastic PBT UL94V-0
扇叶材质: 环保防火PBT UL94V-0
Impeller: Thermoplastic UL94V-0


P-Q 曲线图/P-Q Curve Chart

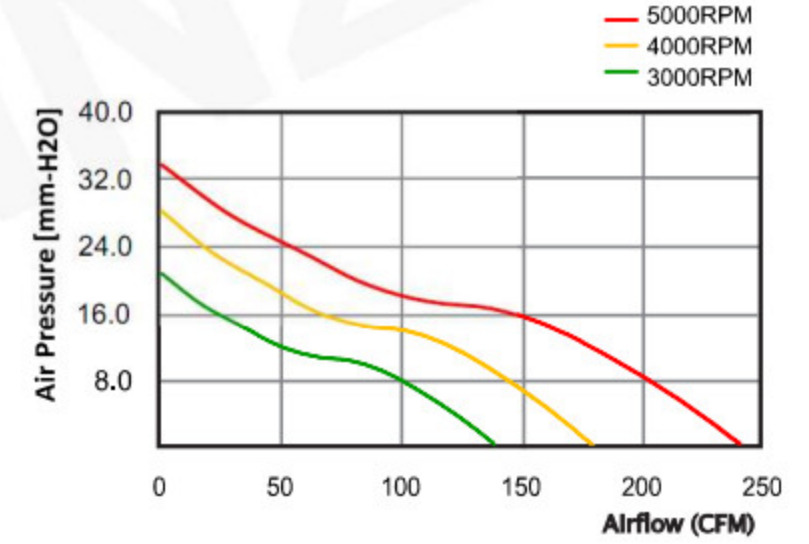

配套产品选项
Attachment Option




配套产品选项
Attachment Option

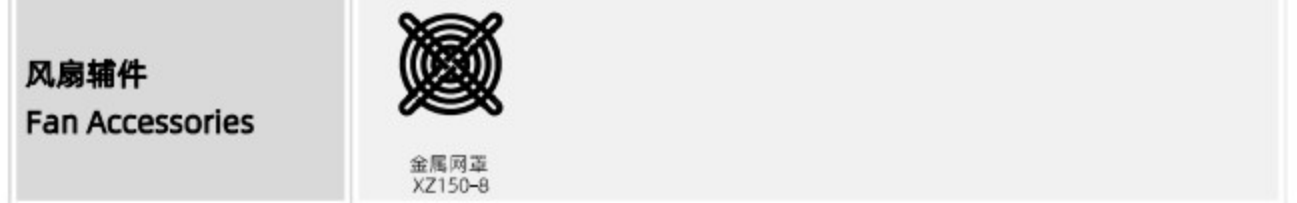

型号 Model	轴承 Bearing System	额定电压 Rated Voltage	频率 Frequency	额定功率 Rated Power	额定转速 Rated Speed	最大风量 Max. Air Flow		最大风压 Max. Air Pressure		噪音 Noise	重量 Weight
	Ball	VAC	Hz	W	RPM	CFM	m³/h	mmH₂O	Pa	dB(A)	g
XE14038BL	B	220	50	14	3000	139.16	236.43	21.45	210.21	56	650
XE14038BM	B			20	4000	176.31	299.55	28.77	281.95	58	
XE14038BH	B			32	5000	238.59	405.36	32.28	316.34	62	




可选功能列表 Available Functions

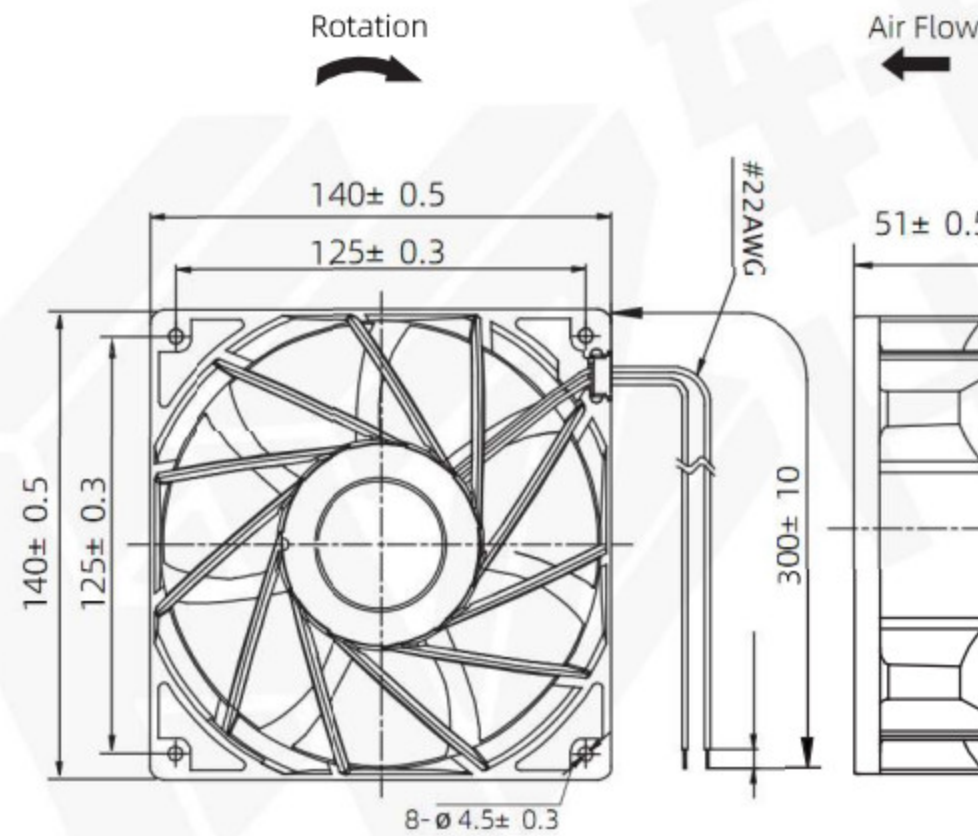

轴承结构: 滚珠轴承
Bearing System: Ball
外框材质: 环保防火PBT UL94V-0
Frame: Thermoplastic PBT UL94V-0
扇叶材质: 环保防火PBT UL94V-0
Impeller: Thermoplastic UL94V-0


P-Q 曲线图/P-Q Curve Chart

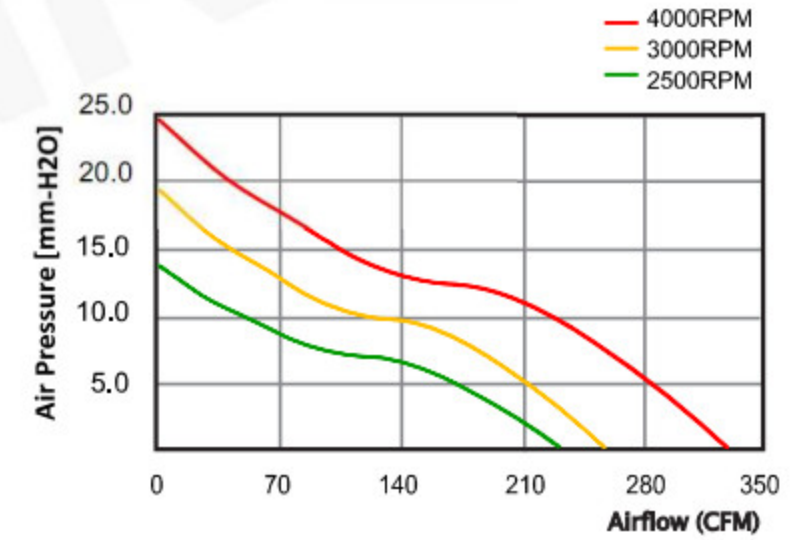

配套产品选项
Attachment Option



配套产品选项
Attachment Option

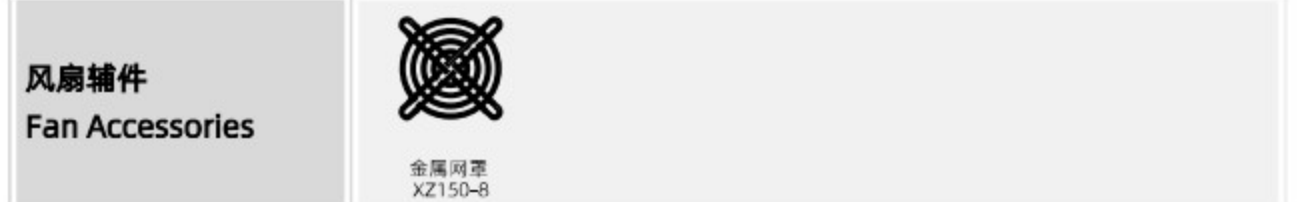

型号 Model	轴承 Bearing System	额定电压 Rated Voltage	频率 Frequency	额定功率 Rated Power	额定转速 Rated Speed	最大风量 Max. Air Flow		最大风压 Max. Air Pressure		噪音 Noise	重量 Weight
	Ball	VAC	Hz	W	RPM	CFM	m³/h	mmH₂O	Pa	dB(A)	g
XE14050BL	B	220	50	25	2500	218.09	370.53	13.02	127.60	56	665
XE14050BM	B			35	3000	246.37	418.58	18.67	182.97	58	
XE14050BH	B			50	4000	318.53	541.18	24.13	236.47	64	

注: 以上数据仅供参考, 如有变更恕不另行通知。

Notes: Above specification is only for reference and subject to change without notice.