



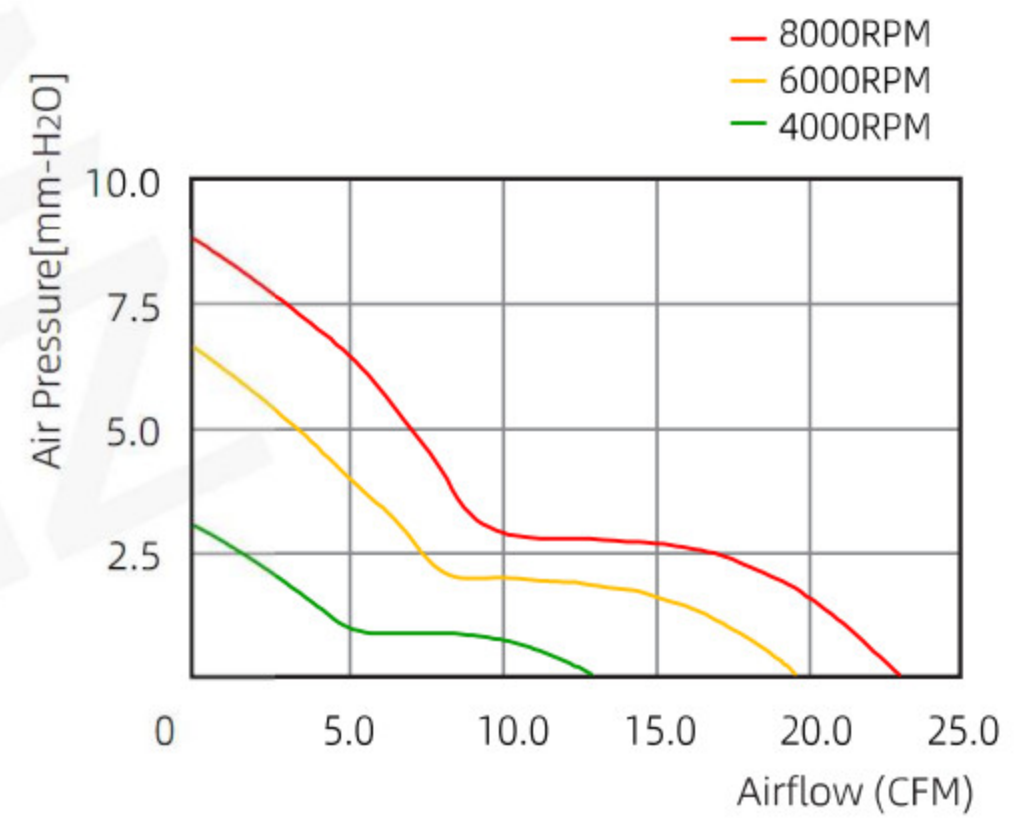

轴承结构：滚珠轴承  
 Bearing System: Ball  
 外框材质：环保防火PBT UL94V-0  
 Frame: Thermoplastic PBT UL94V-0  
 扇叶材质：环保防火PBT UL94V-0  
 Impeller: Thermoplastic UL94V-0

尺寸图Dimension Drawing (Unit : mm)

P-Q 曲线图/P-Q Curve Chart

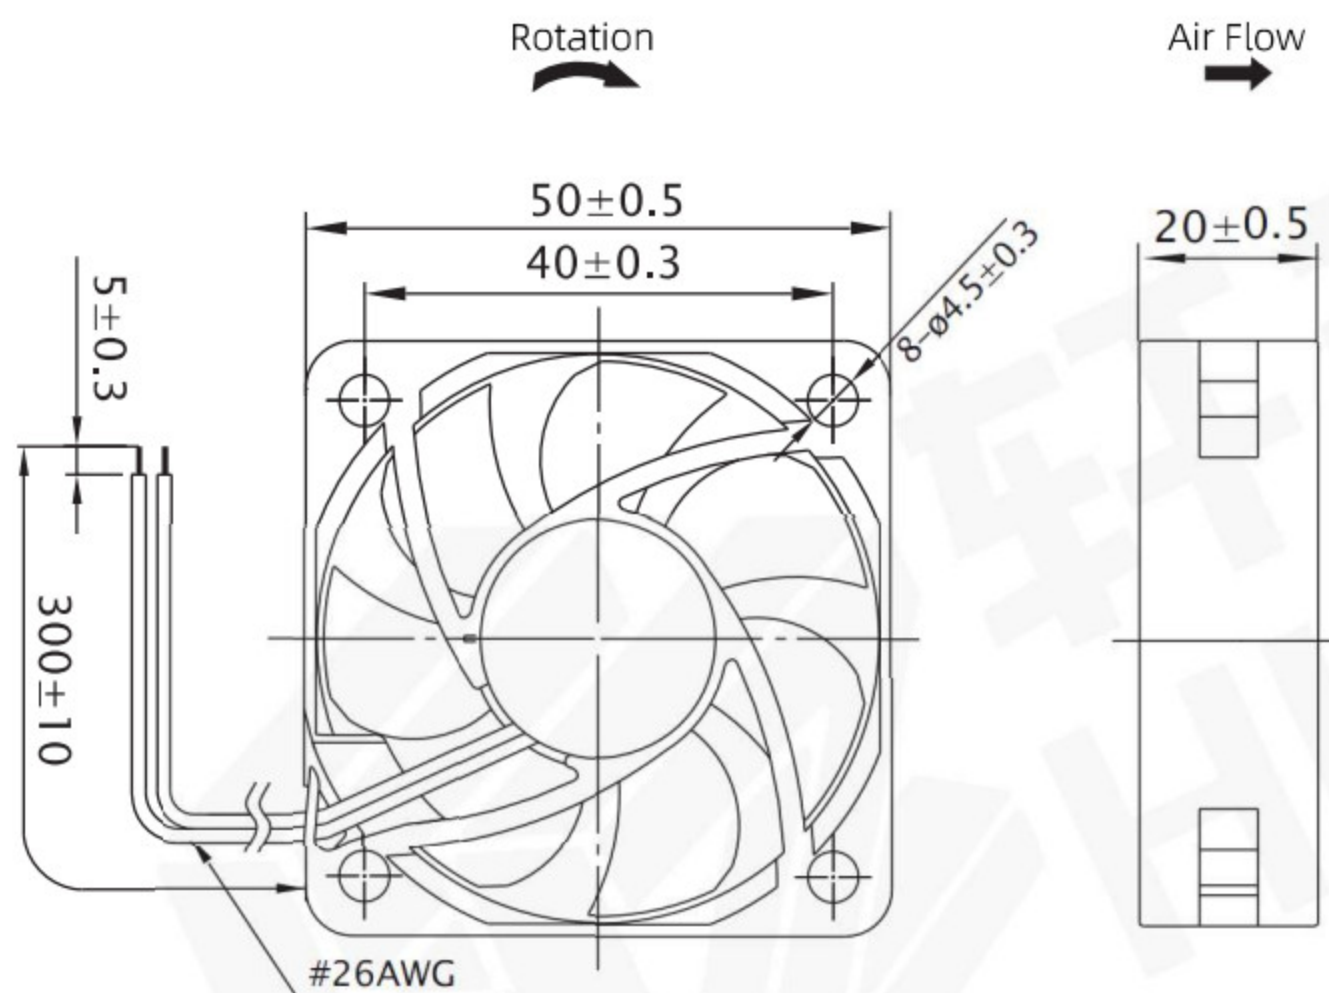

可选功能列表 Available Functions



配套产品选项 Attachment Option



配套产品选项 Attachment Option



| 型号<br>Model | 轴承<br>Bearing System | 额定电压<br>Rated Voltage | 运行电压<br>Operation Voltage | 额定电流<br>Rated Current | 额定转速<br>Rated Speed | 最大风量<br>Max. Air Flow |       | 最大风压<br>Max. Air Pressure |       | 噪音<br>Noise | 重量<br>Weight |
|-------------|----------------------|-----------------------|---------------------------|-----------------------|---------------------|-----------------------|-------|---------------------------|-------|-------------|--------------|
|             | Ball                 | VDC                   | VDC                       | A                     | RPM                 | CFM                   | m³/h  | mmH₂O                     | Pa    | dB(A)       | g            |
| XD5020B05L  | B                    | 5                     | 3.5~5.5                   | 0.15                  | 4000                | 13.18                 | 22.39 | 3.74                      | 36.65 | 27          | 32           |
| XD5020B05M  | B                    |                       |                           | 0.20                  | 5000                | 17.29                 | 29.38 | 5.18                      | 50.76 | 29          |              |
| XD5020B05H  | B                    |                       |                           | 0.33                  | 6000                | 18.71                 | 31.79 | 6.59                      | 64.58 | 32          |              |
| XD5020B12L  | B                    | 12                    | 7.0~13.5                  | 0.06                  | 4000                | 13.18                 | 22.39 | 3.74                      | 36.65 | 27          |              |
| XD5020B12 M | B                    |                       |                           | 0.12                  | 5000                | 15.49                 | 26.32 | 4.39                      | 43.02 | 29          |              |
| XD5020B12H  | B                    |                       |                           | 0.15                  | 6000                | 18.71                 | 31.79 | 6.59                      | 64.58 | 32          |              |
| XD5020B12V  | B                    |                       |                           | 0.20                  | 7000                | 20.87                 | 35.46 | 7.61                      | 74.58 | 39          |              |
| XD5020B12E  | B                    |                       |                           | 0.30                  | 8000                | 23.53                 | 39.98 | 8.81                      | 86.34 | 42          |              |
| XD5020B24L  | B                    | 24                    | 18.0~26.5                 | 0.03                  | 4000                | 13.18                 | 22.39 | 3.74                      | 36.65 | 27          |              |
| XD5020B24M  | B                    |                       |                           | 0.06                  | 5000                | 15.49                 | 26.32 | 4.39                      | 43.02 | 29          |              |
| XD5020B24H  | B                    |                       |                           | 0.08                  | 6000                | 18.71                 | 31.79 | 6.59                      | 64.58 | 32          |              |
| XD5020B24V  | B                    |                       |                           | 0.09                  | 7000                | 20.81                 | 35.36 | 7.31                      | 71.64 | 39          |              |
| XD5020B24E  | B                    |                       |                           | 0.15                  | 8000                | 23.53                 | 39.98 | 8.81                      | 86.34 | 42          |              |

■ 注：以上数据仅供参考，如有变更恕不另行通知。  
 Notes: Above specification is only for reference and subject to change without notice.