



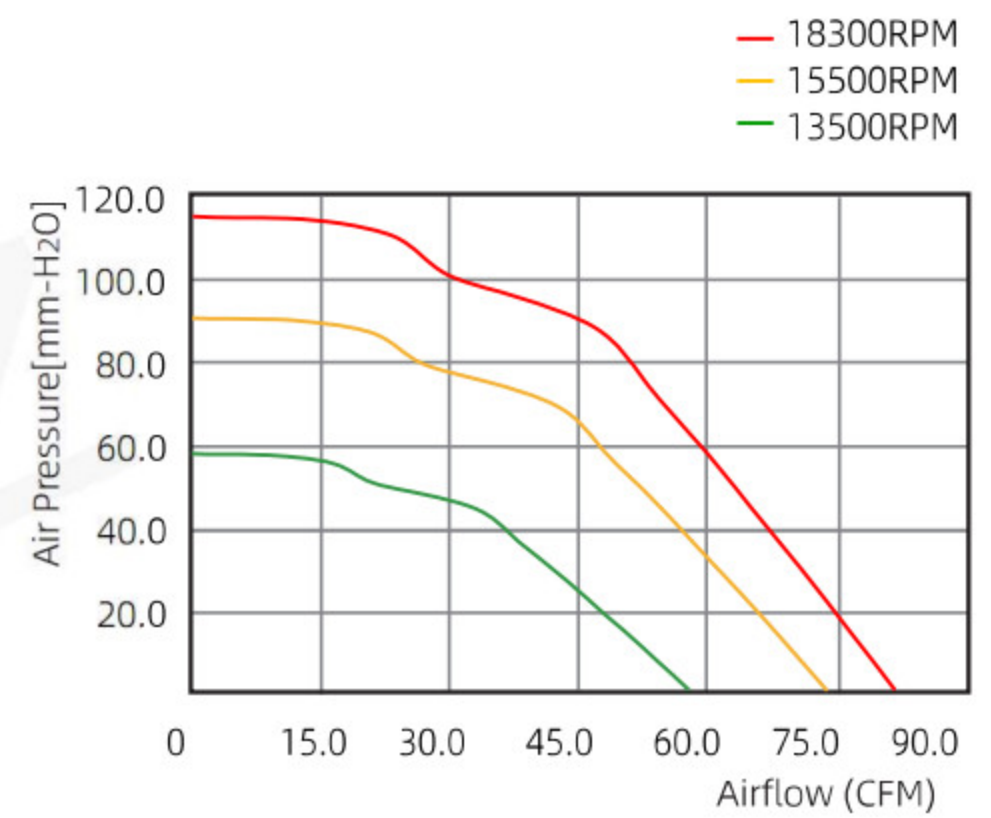

轴承结构: 滚珠轴承  
Bearing System: Ball  
外框材质: 环保防火PBT UL94V-0  
Frame: Thermoplastic PBT UL94V-0  
扇叶材质: 环保防火PBT UL94V-0  
Impeller: Thermoplastic UL94V-0

## 尺寸图Dimension Drawing (Unit : mm)

## P-Q 曲线图/P-Q Curve Chart

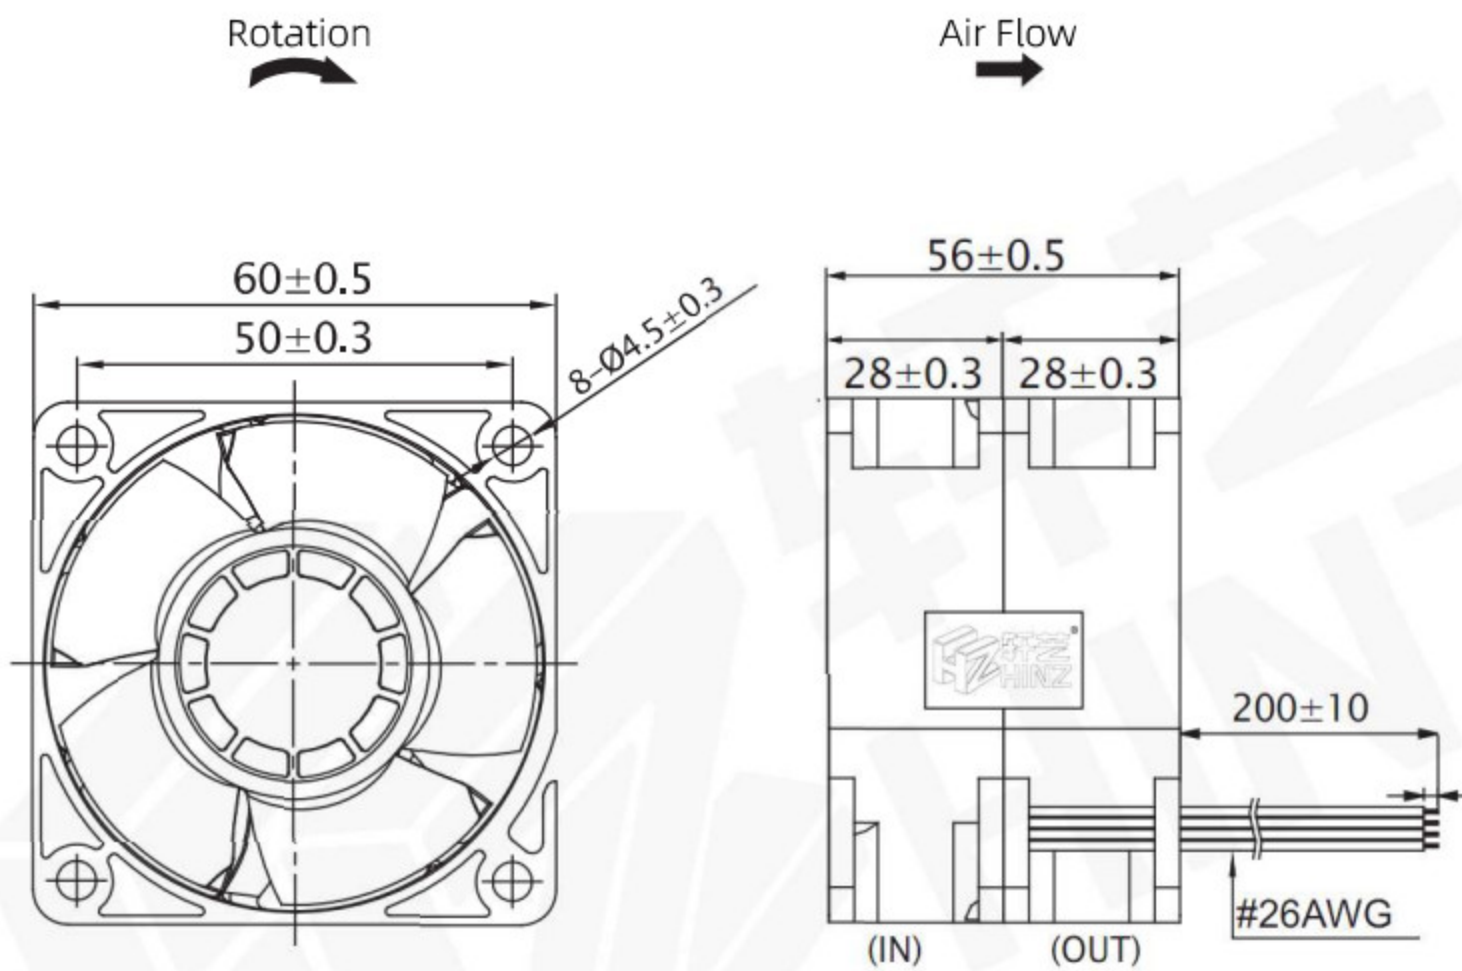

## 可选功能列表 Available Functions



### 配套产品选项 Attachment Option



### 配套产品选项 Attachment Option



| 型号<br>Model | 轴承<br>Bearing System | 额定电压<br>Rated Voltage | 运行电压<br>Operation Voltage | 额定电流<br>Rated Current | 额定转速<br>Rated Speed | 最大风量<br>Max. Air Flow |                   | 最大风压<br>Max. Air Pressure |         | 噪音<br>Noise | 重量<br>Weight |
|-------------|----------------------|-----------------------|---------------------------|-----------------------|---------------------|-----------------------|-------------------|---------------------------|---------|-------------|--------------|
|             | Ball                 | VDC                   | VDC                       | A                     | RPM                 | CFM                   | m <sup>3</sup> /h | mmH <sub>2</sub> O        | Pa      | dB(A)       | g            |
| XG6056B12L  | B                    | 12                    | 7.0~13.5                  | 1.43                  | 13500/11500         | 58.18                 | 98.85             | 59.68                     | 584.86  | 67          | 170          |
| XG6056B12M  | B                    |                       |                           | 2.52                  | 15500/14500         | 73.15                 | 124.28            | 87.57                     | 858.19  | 70          |              |
| XG6056B12H  | B                    |                       |                           | 3.50                  | 18300/17300         | 80.31                 | 136.45            | 113.53                    | 1112.59 | 75          |              |
| XG6056B24L  | B                    | 24                    | 18.0~26.5                 | 0.72                  | 13500/11500         | 58.18                 | 98.85             | 59.68                     | 584.86  | 67          |              |
| XG6056B24M  | B                    |                       |                           | 1.30                  | 15500/14500         | 73.15                 | 124.28            | 87.57                     | 858.19  | 70          |              |
| XG6056B24H  | B                    |                       |                           | 1.75                  | 18300/17300         | 80.31                 | 136.45            | 113.53                    | 1112.59 | 75          |              |

注: 以上数据仅供参考, 如有变更恕不另行通知。

Notes: Above specification is only for reference and subject to change without notice.