



轴承结构：滚珠轴承

Bearing System: Ball

外框材质：环保防火PBT UL94V-0




Frame: Thermoplastic PBT UL94V-0

扇叶材质：环保防火PBT UL94V-0

Impeller: Thermoplastic UL94V-0

尺寸图Dimension Drawing (Unit : mm)

P-Q 曲线图/P-Q Curve Chart

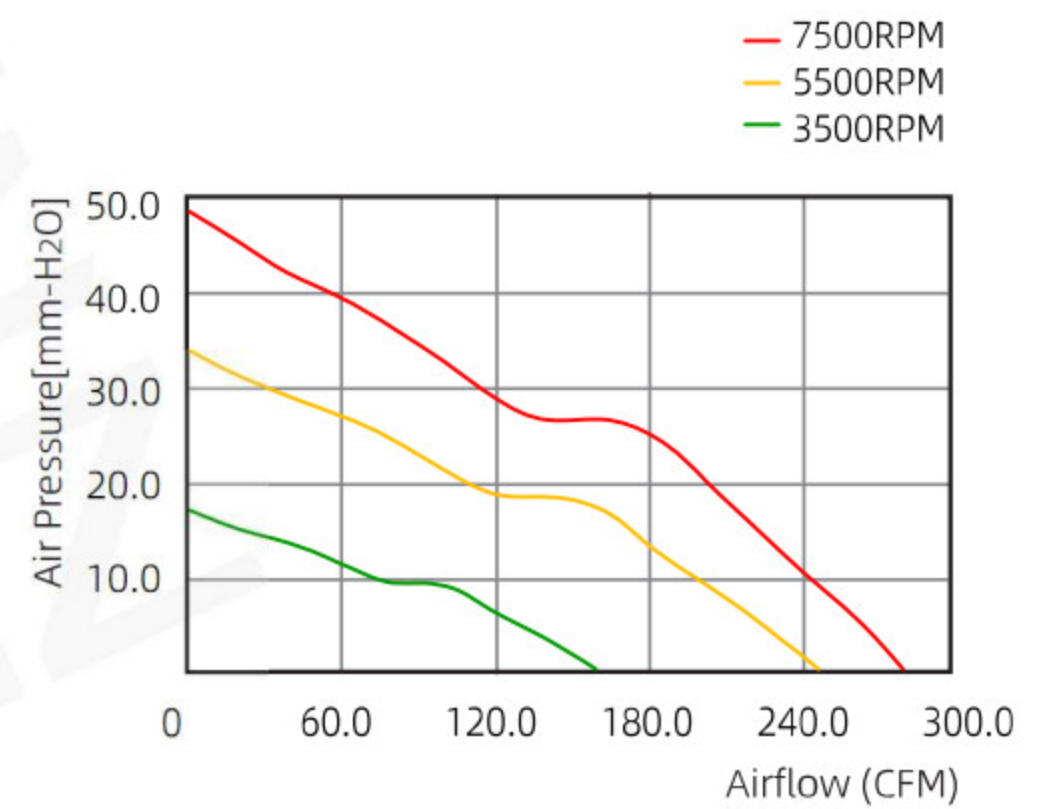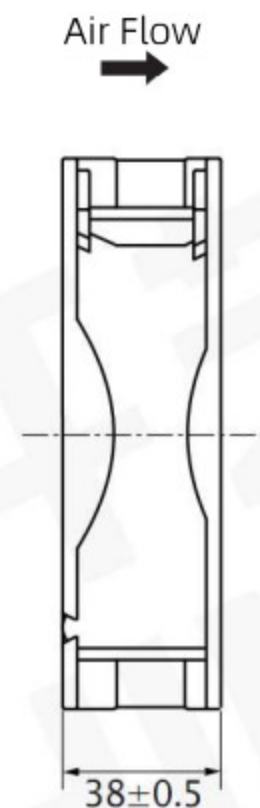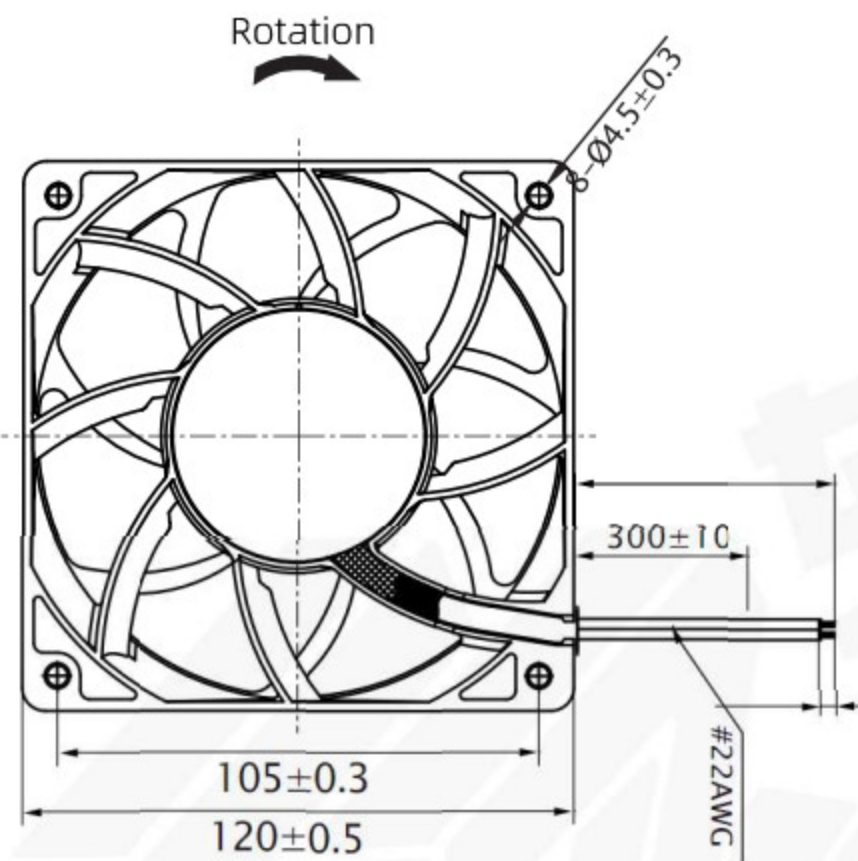

可选功能列表 Available Functions



配套产品选项 Attachment Option



配套产品选项 Attachment Option



型号 Model	轴承 Bearing System	额定电压 Rated Voltage	运行电压 Operation Voltage	额定电流 Rated Current	额定转速 Rated Speed	最大风量 Max. Air Flow		最大风压 Max. Air Pressure		噪音 Noise	重量 Weight
		VDC	VDC	A	RPM	CFM	m ³ /h	mmH ₂ O	Pa	dB(A)	g
XG12038B12L	B	12	7.0~13.5	0.56	2500	113.59	192.99	9.38	91.92	49	290
XG12038B12M	B			0.80	3500	167.72	284.96	16.36	160.33	53	
XG12038B12H	B			1.50	4500	215.72	366.51	22.54	220.89	56	
XG12038B12V	B			2.50	5500	249.67	424.19	33.67	329.97	62	
XG12038B12E	B			2.60	6500	259.71	441.25	39.03	382.49	63	
XG12038B12S	B			3.50	7500	272.51	462.99	46.77	458.35	69	
XG12038B24L	B	24	18.0~26.5	0.28	2500	113.59	192.99	9.38	91.92	49	
XG12038B24M	B			0.38	3500	167.72	284.96	16.36	160.33	53	
XG12038B24H	B			0.75	4500	215.72	366.51	22.54	220.89	56	
XG12038B24V	B			1.25	5500	249.67	424.19	33.67	329.97	62	
XG12038B24E	B			1.30	6500	259.71	441.25	39.03	382.49	63	
XG12038B24S	B			1.75	7500	272.51	462.99	46.77	458.35	69	
XG12038B48L	B	48	36.0~54.0	0.14	2500	113.59	192.99	9.38	91.92	49	
XG12038B48M	B			0.20	3500	167.72	284.96	16.36	160.33	53	
XG12038B48H	B			0.40	4500	215.72	366.51	22.54	220.89	56	
XG12038B48V	B			0.62	5500	249.67	424.19	33.67	329.97	62	
XG12038B48E	B			0.65	6500	259.71	441.25	39.03	382.49	63	
XG12038B48S	B			0.88	7500	272.51	462.99	46.77	458.35	69	

注：以上数据仅供参考，如有变更恕不另行通知。

Notes: Above specification is only for reference and subject to change without notice.

AC Axial fan
AC轴流风机

EC Axial fan
EC轴流风机

DC Axial fan
DC轴流风机

AC Centrifugal fan
AC离心风机

EC Centrifugal fan
EC离心风机

AC External rotor fan
AC外转子风机

Fan filter
风扇过滤器

Governor/Voltage Regulator
调速器&调压器

Temperature control products
温控产品

Accessories
附件