



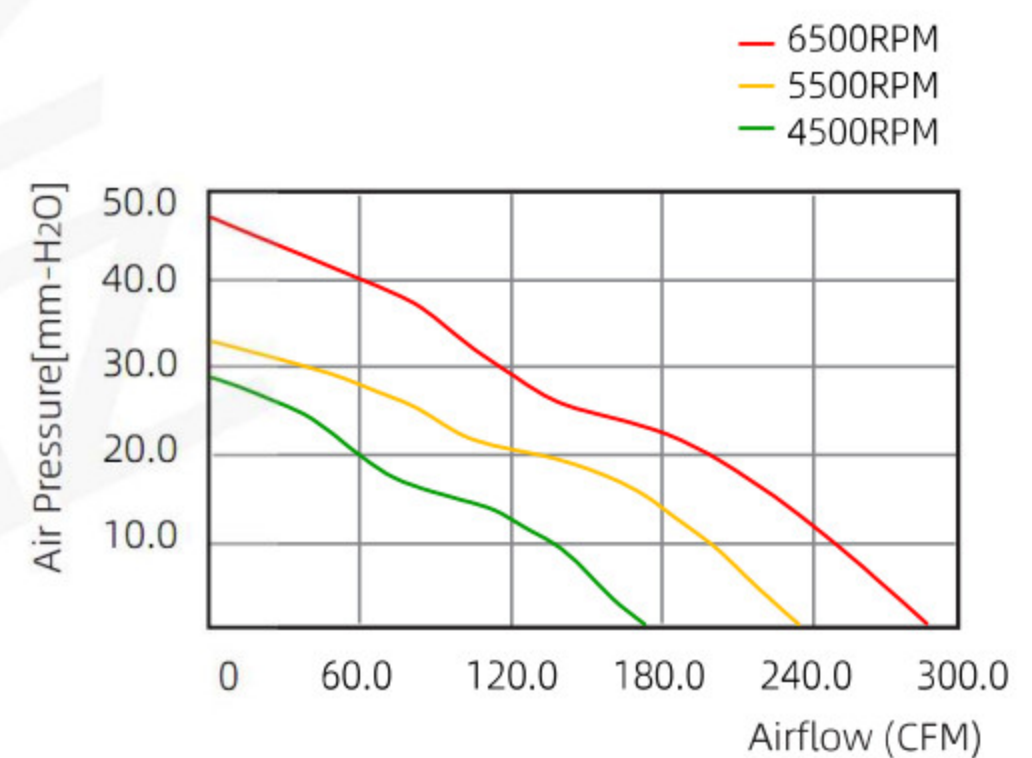

轴承结构：滚珠轴承  
 Bearing System: Ball  
 外框材质：环保防火PBT UL94V-0  
 Frame: Thermoplastic PBT UL94V-0  
 扇叶材质：环保防火PBT UL94V-0  
 Impeller: Thermoplastic UL94V-0

尺寸图Dimension Drawing (Unit : mm)

P-Q 曲线图/P-Q Curve Chart

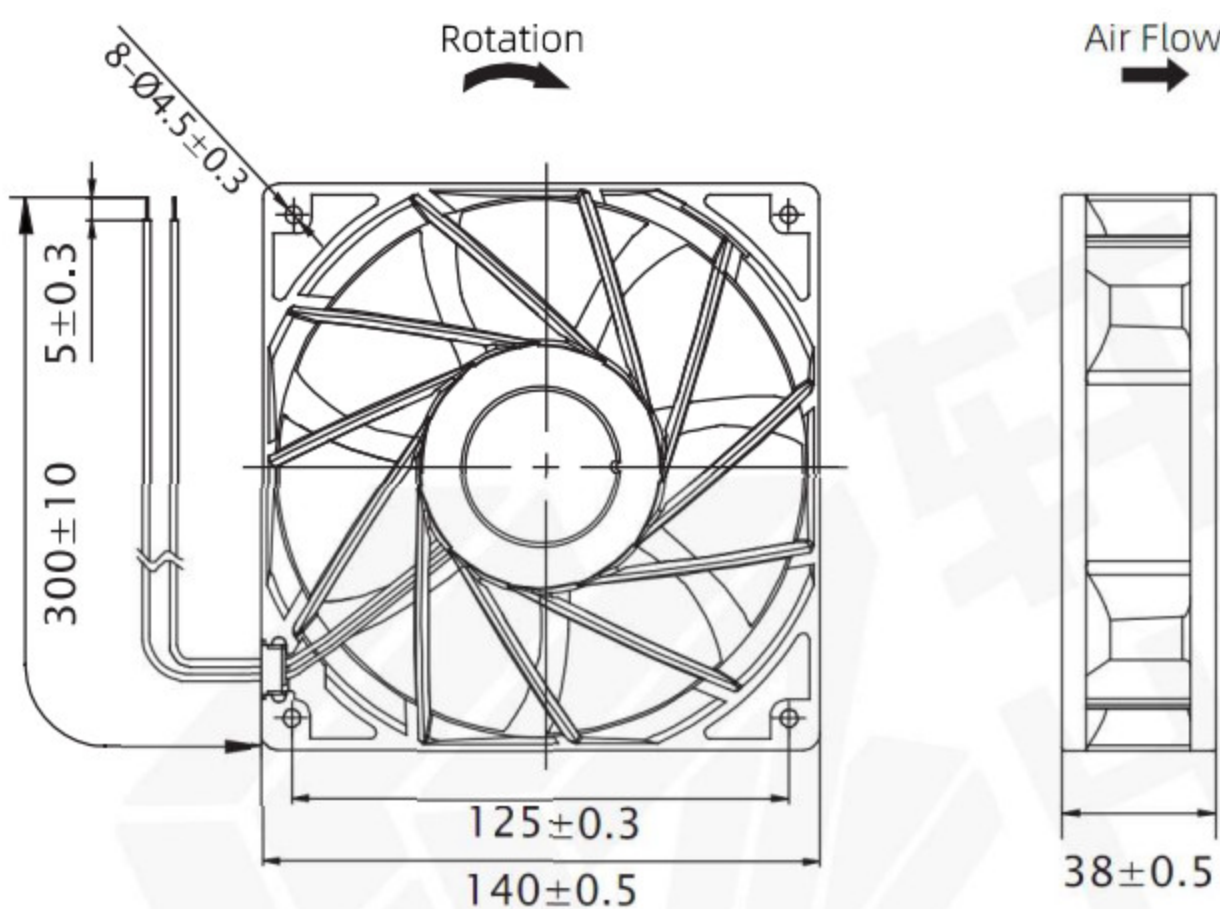

可选功能列表 Available Functions



配套产品选项  
Attachment Option



配套产品选项  
Attachment Option



| 型号<br>Model | 轴承<br>Bearing System | 额定电压<br>Rated Voltage | 运行电压<br>Operation Voltage | 额定电流<br>Rated Current | 额定转速<br>Rated Speed | 最大风量<br>Max. Air Flow |        | 最大风压<br>Max. Air Pressure |        | 噪音<br>Noise | 重量<br>Weight |
|-------------|----------------------|-----------------------|---------------------------|-----------------------|---------------------|-----------------------|--------|---------------------------|--------|-------------|--------------|
|             | Ball                 | VDC                   | VDC                       | A                     | RPM                 | CFM                   | m³/h   | mmH₂O                     | Pa     | dB(A)       | g            |
| XG14038B12L | B                    | 12                    | 7.0~13.5                  | 0.30                  | 2500                | 126.59                | 215.08 | 17.81                     | 174.54 | 41          | 610          |
| XG14038B12M | B                    |                       |                           | 0.65                  | 3500                | 142.83                | 242.67 | 22.65                     | 221.97 | 49          |              |
| XG14038B12H | B                    |                       |                           | 1.03                  | 4500                | 178.51                | 303.29 | 29.62                     | 290.28 | 58          |              |
| XG14038B12V | B                    |                       |                           | 1.50                  | 5500                | 238.52                | 405.25 | 32.62                     | 319.68 | 63          |              |
| XG14038B12E | B                    |                       |                           | 3.30                  | 6500                | 288.63                | 490.38 | 47.75                     | 467.95 | 68          |              |
| XG14038B24L | B                    | 24                    | 18.0~26.5                 | 0.16                  | 2500                | 126.59                | 215.08 | 17.81                     | 174.54 | 41          |              |
| XG14038B24M | B                    |                       |                           | 0.33                  | 3500                | 142.83                | 242.67 | 22.65                     | 221.97 | 49          |              |
| XG14038B24H | B                    |                       |                           | 0.52                  | 4500                | 178.51                | 303.29 | 29.62                     | 290.28 | 58          |              |
| XG14038B24V | B                    |                       |                           | 0.75                  | 5500                | 238.52                | 405.25 | 32.62                     | 319.68 | 63          |              |
| XG14038B24E | B                    |                       |                           | 1.70                  | 6500                | 288.63                | 490.38 | 47.75                     | 467.95 | 68          |              |

■ 注：以上数据仅供参考，如有变更恕不另行通知。  
 Notes: Above specification is only for reference and subject to change without notice.