



轴承结构：滚珠轴承

Bearing System: Ball

外框材质：环保防火PBT UL94V-0



Frame: Thermoplastic PBT UL94V-0

扇叶材质：环保防火PBT UL94V-0

Impeller: Thermoplastic UL94V-0

尺寸图Dimension Drawing (Unit : mm)

P-Q 曲线图/P-Q Curve Chart

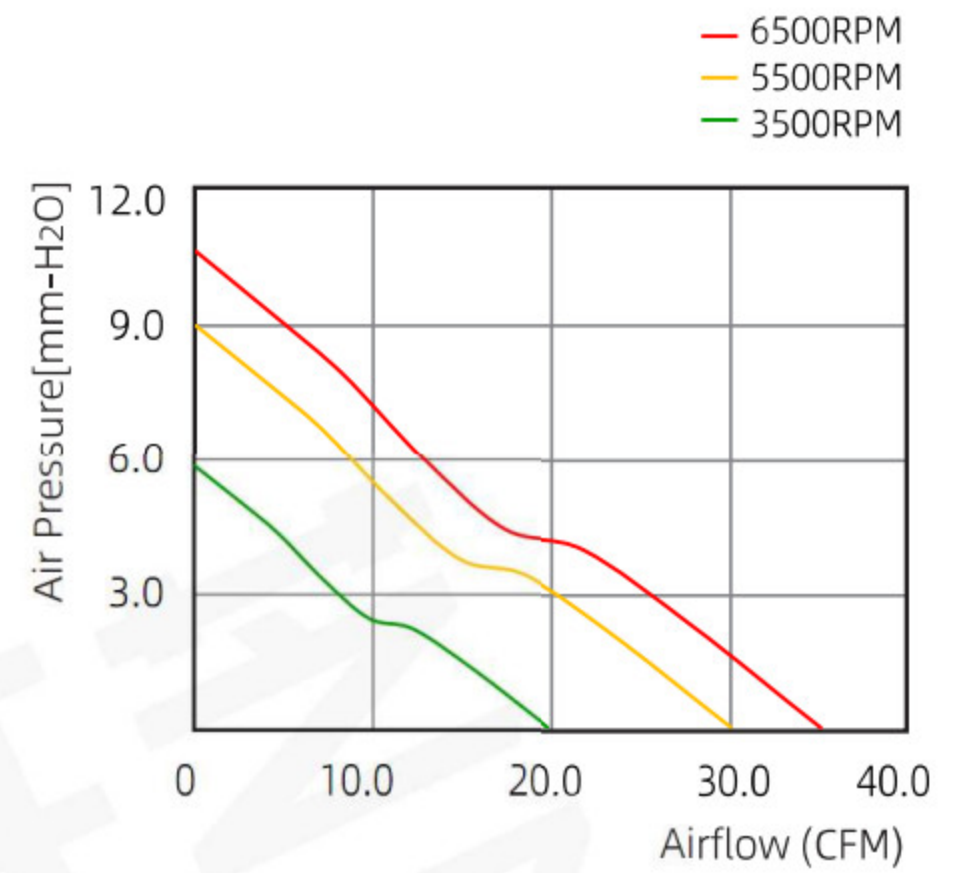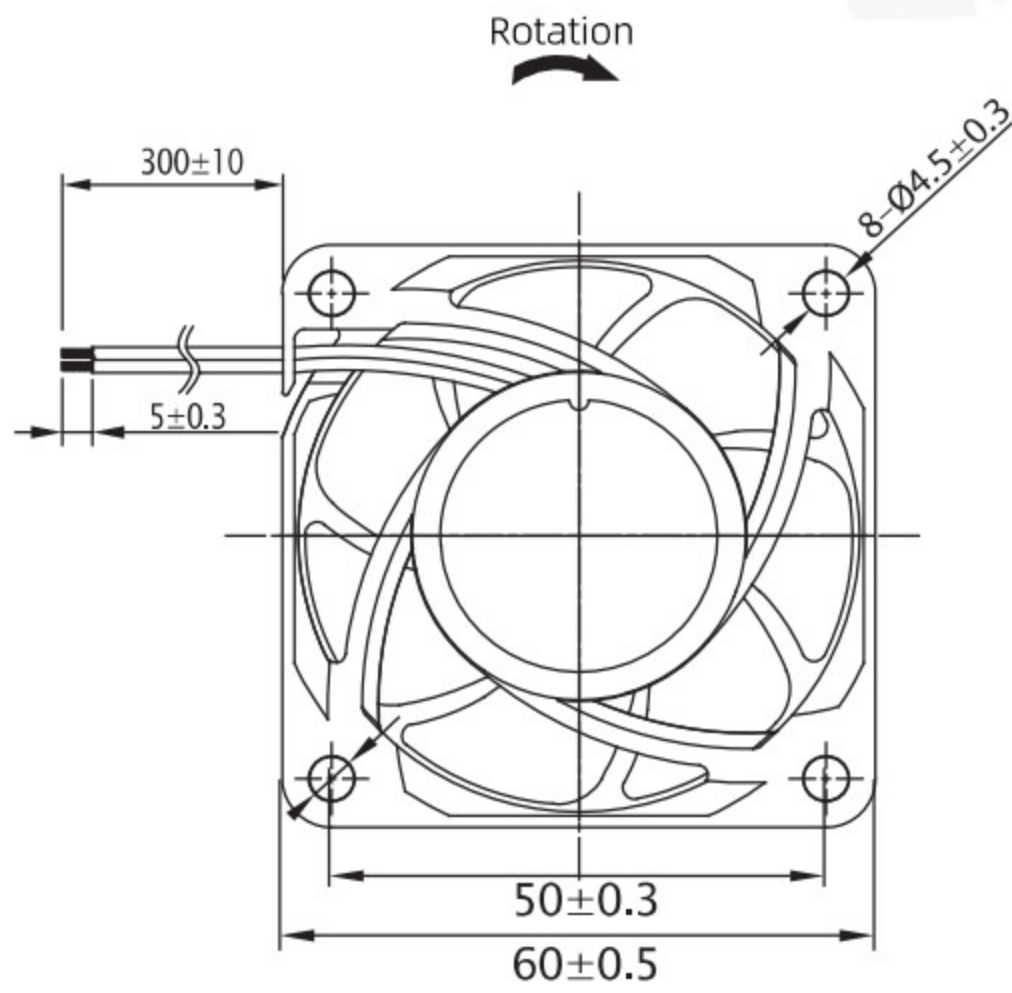

可选功能列表 Available Functions



配套产品选项  
Attachment Option

控制技术  
Control Technology



配套产品选项  
Attachment Option

风扇附件  
Fan Accessories



| 型号<br>Model | 轴承<br>Bearing<br>System | 额定电压<br>Rated<br>Voltage | 运行电压<br>Operation<br>Voltage | 额定电流<br>Rated<br>Current | 额定转速<br>Rated Speed | 最大风量<br>Max. Air Flow |       | 最大风压<br>Max. Air Pressure |        | 噪音<br>Noise | 重量<br>Weight |
|-------------|-------------------------|--------------------------|------------------------------|--------------------------|---------------------|-----------------------|-------|---------------------------|--------|-------------|--------------|
|             | Ball                    | VDC                      | VDC                          | A                        | RPM                 | CFM                   | m³/h  | mmH₂O                     | Pa     | dB(A)       | g            |
| XD6025B12LN | B                       | 12                       | 7.0~13.5                     | 0.12                     | 2500                | 13.70                 | 23.28 | 4.13                      | 40.47  | 22.0        | 56           |
| XD6025B12MN | B                       |                          |                              | 0.11                     | 3500                | 19.17                 | 32.57 | 5.76                      | 56.45  | 26.0        |              |
| XD6025B12HN | B                       |                          |                              | 0.21                     | 4500                | 24.65                 | 41.89 | 7.40                      | 72.52  | 31.2        |              |
| XD6025B12VN | B                       |                          |                              | 0.26                     | 5500                | 30.14                 | 51.20 | 9.03                      | 88.49  | 37.5        |              |
| XD6025B12EN | B                       |                          |                              | 0.32                     | 6500                | 35.62                 | 60.51 | 10.66                     | 104.47 | 39.0        |              |
| XD6025B24LN | B                       | 24                       | 18.0~26.5                    | 0.06                     | 2500                | 13.70                 | 23.28 | 4.13                      | 40.47  | 22.0        |              |
| XD6025B24MN | B                       |                          |                              | 0.07                     | 3500                | 19.17                 | 32.57 | 5.76                      | 56.45  | 26.0        |              |
| XD6025B24HN | B                       |                          |                              | 0.11                     | 4500                | 24.65                 | 41.89 | 7.40                      | 72.52  | 31.2        |              |
| XD6025B24VN | B                       |                          |                              | 0.13                     | 5500                | 30.14                 | 51.20 | 9.03                      | 88.49  | 37.5        |              |
| XD6025B24EN | B                       |                          |                              | 0.16                     | 6500                | 35.62                 | 60.51 | 10.66                     | 104.47 | 39.0        |              |

注：以上数据仅供参考，如有变更恕不另行通知。

Notes: Above specification is only for reference and subject to change without notice.