


P-Q 曲线图/P-Q Curve Chart

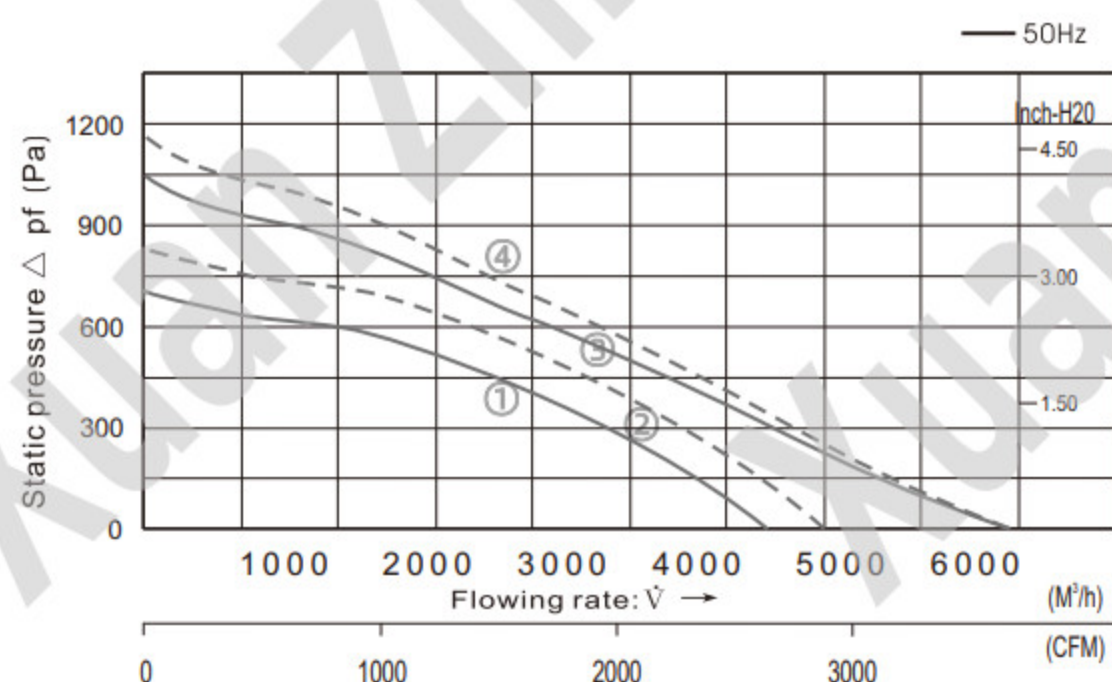

风机类型: 后倾式离心风机

材 质: 铝板

出风方向: 转子顺时针方向

电机保护: 热保护器

绝缘等级: F

防护等级: IP44

环境温度: -25°C~60°C

Fan type: centrifugal fan

Material: Aluminium sheet

Outlet direction: Rotor timing direction

Motor protection: thermal protector


Insulation class: F

Class of protection: IP44

Ambient temperature: -25°C~60°C

型号 Model	电压 Voltage	频率 Frequency	输入电流 Input Current	输入功率 Input power	转速 Speed	最大风量 Max. Air Flow		最大静压 Max. Static pressure	噪音 Noise	曲线 Curve
Part no.	V	HZ	AMP	W	R/min	CFM	m³/h	Pa	dB(A)	No
XE2S400-137L-320F	115	50/60	7.00	760	1720	2705	4600	680	78	①
XE2E400-137L-320F	230	50/60	3.60	760	1720	2705	4600	680	78	①
XE2E400-137H-320F	230	50/60	6.80	1450	2400	3528	6000	1050	89	③
XE4D400-137L-320F	380	50/60	1.50	780	1720	2705	4600	680	78	①
XE4D400-137M-320F	380	50/60	1.80	1000	2100	2940	5000	800	83	②
XE4D400-137H-320F	380	50/60	2.70	1700	2500	3528	6000	1150	89	④

尺寸图Dimension Drawing (Unit : mm)

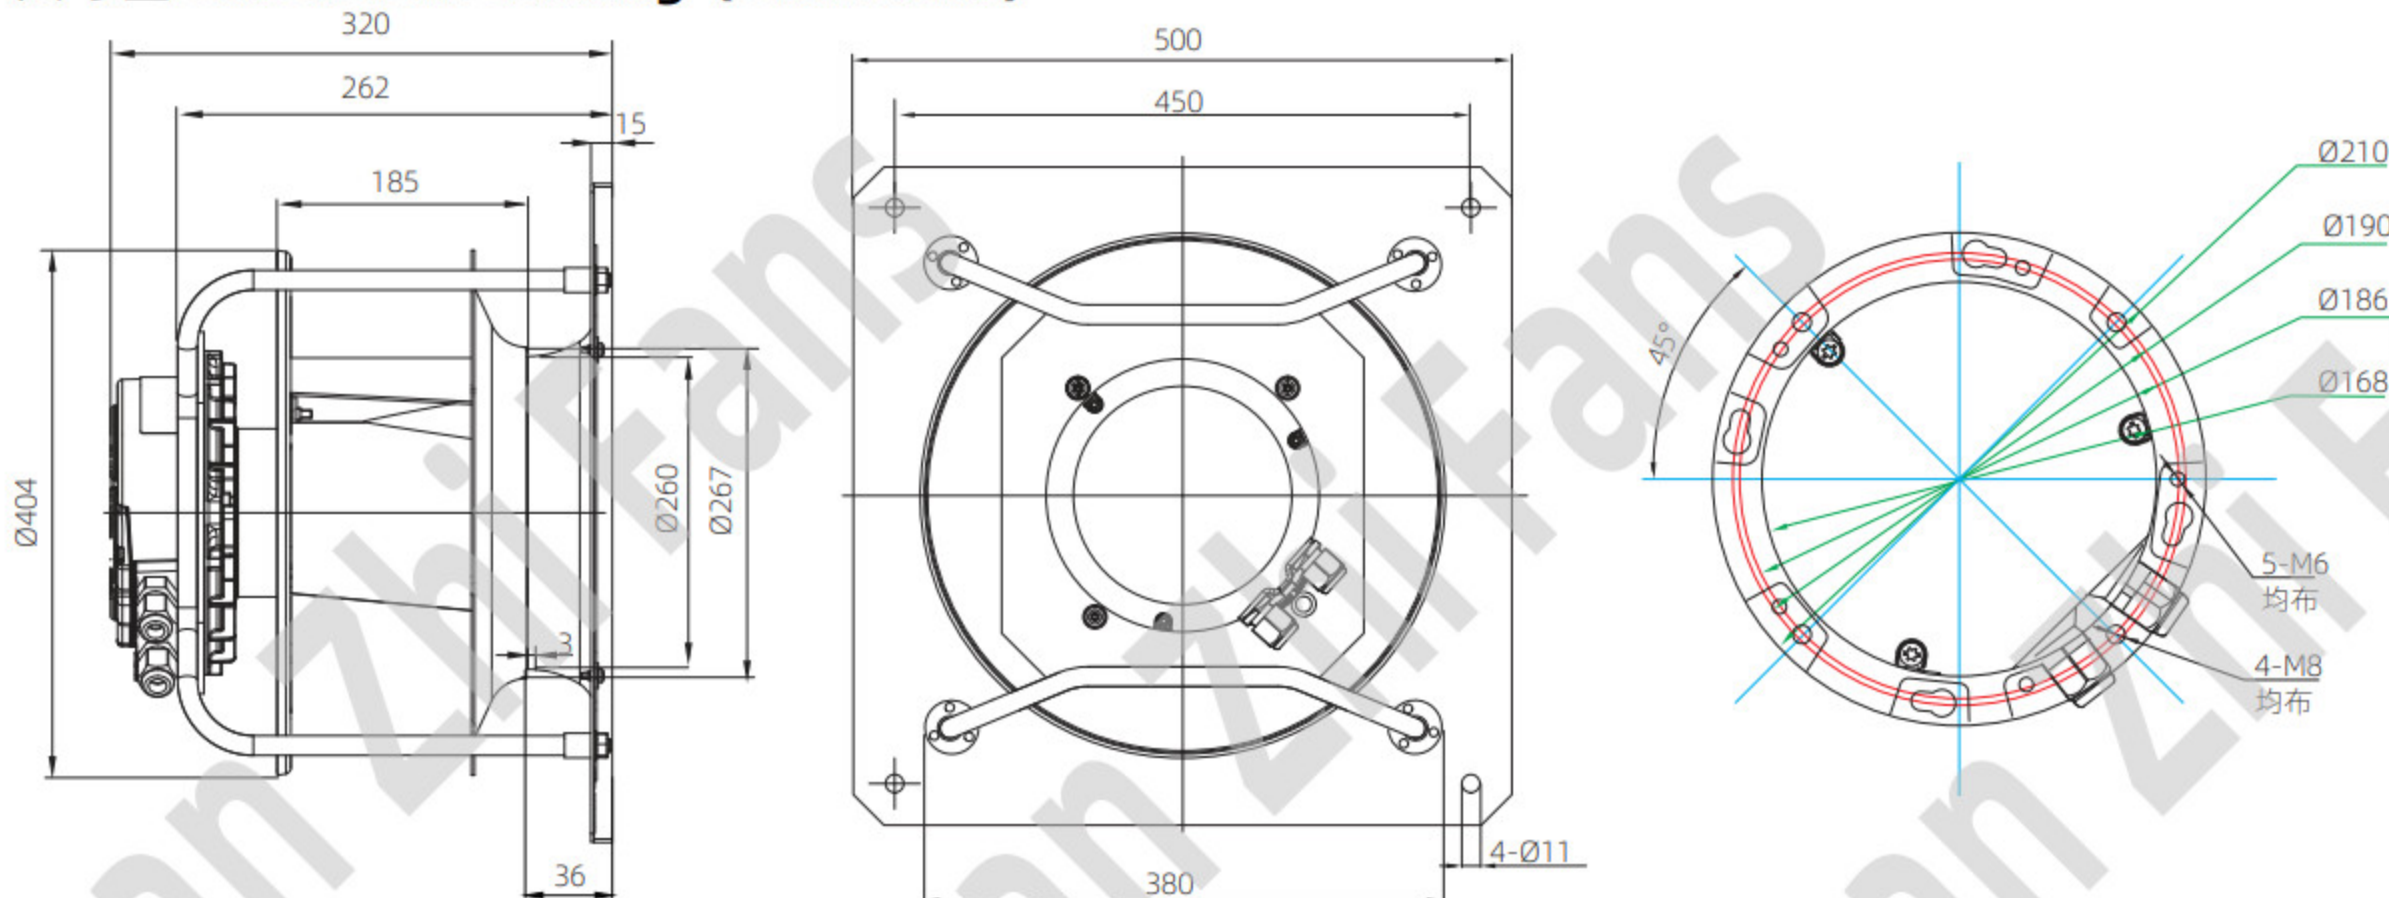

■ 注: 以上数据仅供参考, 如有变更恕不另行通知。

Notes: Above specification is only for reference and subject to change without notice.