


P-Q 曲线图/P-Q Curve Chart

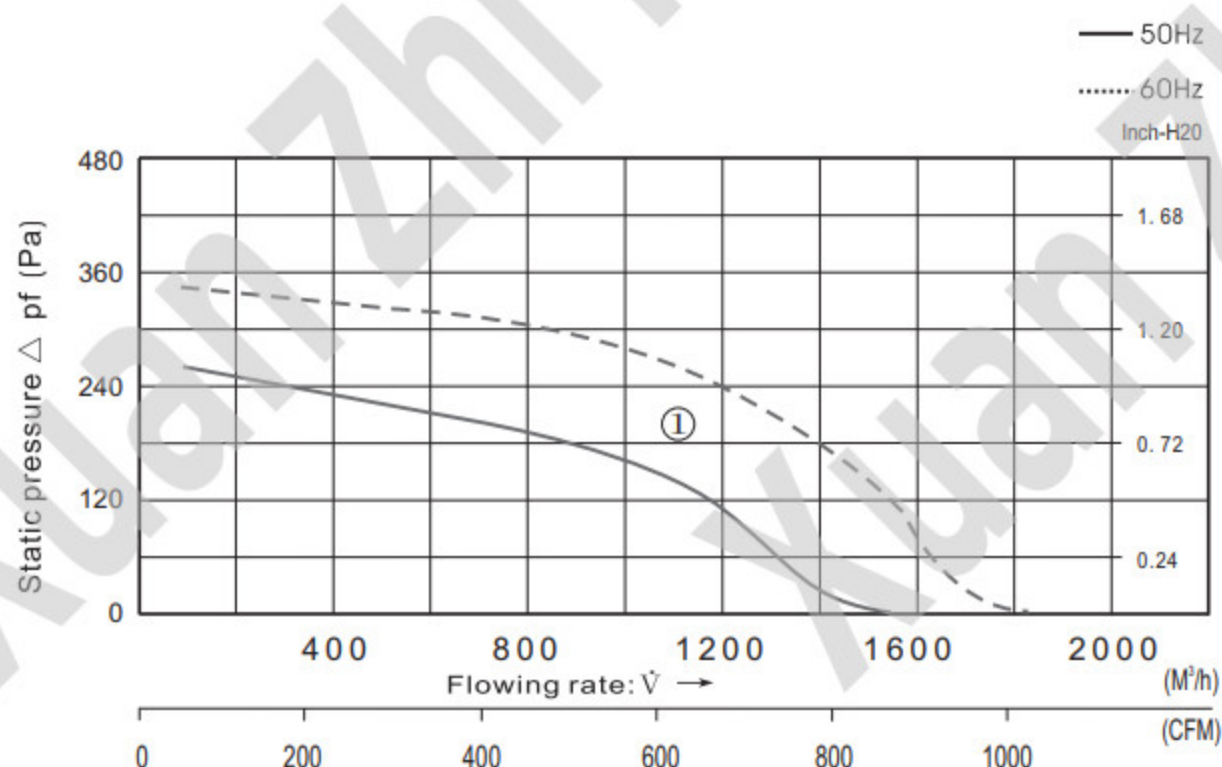


风机类型: 后倾式离心风机
材 质: PA尼龙
出风方向: 转子顺时针方向
电机保护: 热保护器
绝缘等级: F
防护等级: IP44
环境温度: -25°C~60°C

Fan type: centrifugal fan
Material: Polyamide
Outlet direction: Rotor timing direction
Motor protection: thermal protector
Insulation class: F
Class of protection: IP44
Ambient temperature: -25°C~60°C

型号 Model	电压 Voltage	频率 Frequency	电流 Current	输入功率 Input power	转速 Speed	最大风量 Max. Air Flow		最大静压 Max. Static pressure	噪音 Noise	电容 Capacitor
Part no.	V	HZ	AMP	W	R/min	CFM	m³/h	Pa	dB(A)	μF
XZ2S294B-H102-158	115	50/60	0.84/1.00	90/118	1410/1650	896/1080	1522/1835	306/408	66/69	12.0/250V
XZ2E294B-H102-158	230	50/60	0.42/0.51	90/118	1410/1650	896/1080	1522/1835	306/408	66/69	3.0/450V
XZ4D294B-H102-158	380	50/60	0.25/0.3	90/118	1410/1650	896/1080	1522/1835	306/408	66/69	—

尺寸图Dimension Drawing (Unit : mm)

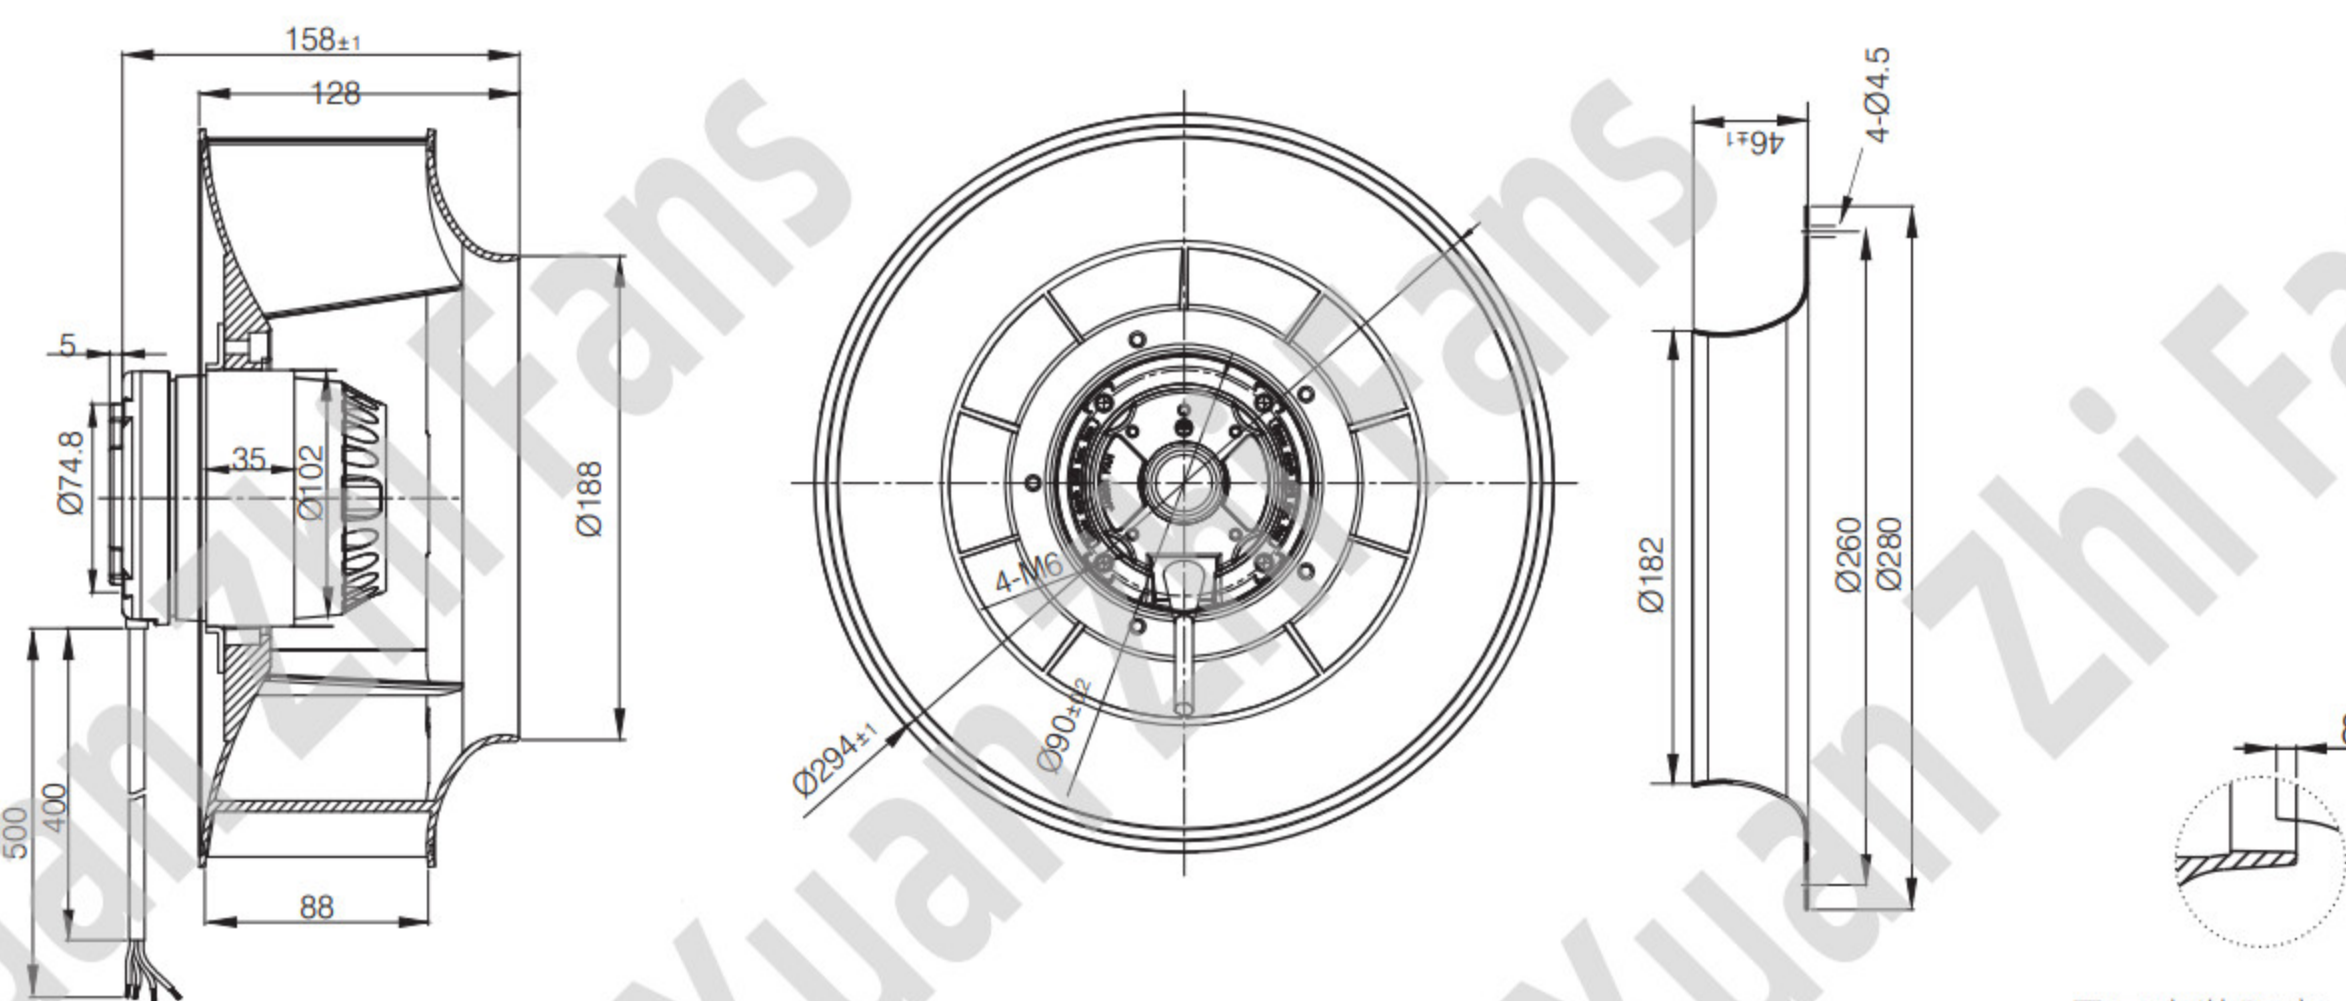

导风圈 (附件)
Inlet ring (accessory)

风口安装距离
Installation distance
between fan and inlet ring

注: 以上数据仅供参考, 如有变更恕不另行通知。

Notes: Above specification is only for reference and subject to change without notice.